
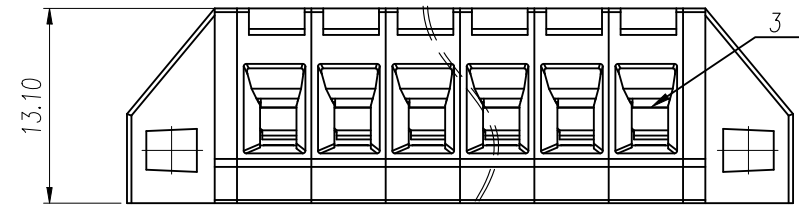


除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。

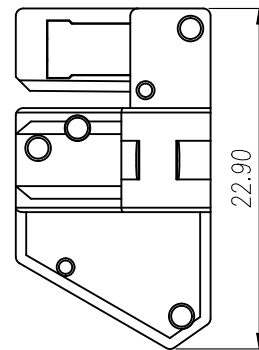

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		WuBW	24.12.02

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range	28-12		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V		
IEC 技术参数		IEC 60664-1		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积	Conductor cross section	0.2-2.5		
硬质/柔性导线	Solid/flexible [mm²]			
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactar Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
间距 Pitch /极数 Poles	[mm] / [P]	5.0/ 02-24		
剥线长度 Stripping Length	[mm]	7-8		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	/		
工作温度 Operating temperature	[°C]	-40~105		
焊接方式 Soldering method		/		
引针尺寸 Pin Dimensions	[mm]	/		
PCB板孔径 PCB Hole Diameter	[mm]	/		
符合RoHS环保要求				

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Cover	PA66	UL94V-0	DES.	WuBW	DATE	24.12.02	UNITS	mm	THIRD ANGLE PROJECTION			
4	Cover	PA66	UL94V-0	CHK.	YangHJ	DATE	24.12.02	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
3	Spring	Stainless steel		APP.	JASON	DATE	24.12.02	SCALE	2:1	DRAWING TYPE: SP-03		REV	0
2	Clamp	Copper Alloy	Sn Plated	 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ0406-05XX-1Y-00A			
1	Housing	PA66	UL94V-0										
ITEM	NAME OF PART	MATERIAL	NOTES										