
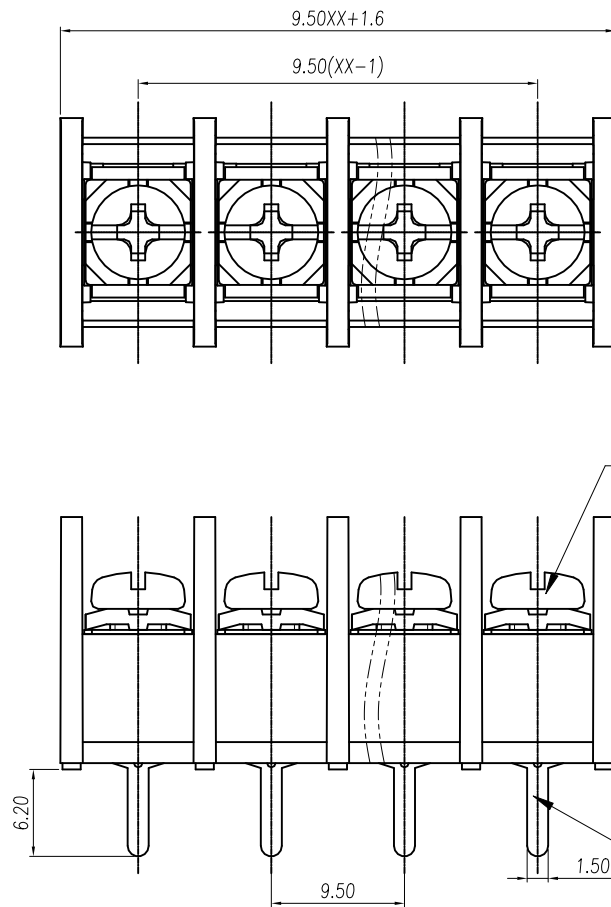
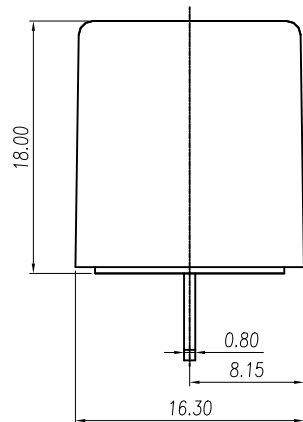


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经授权复制或传播本文件内容，或未经授权使用本文件内容，侵权者将承担法律责任。本公司保留所有权利。

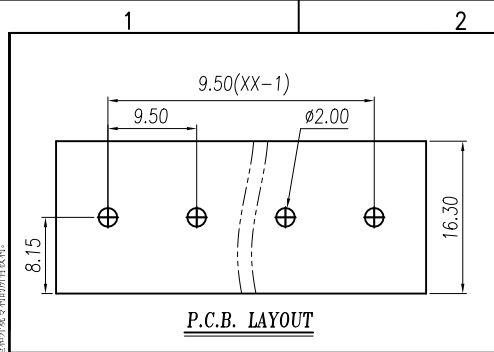

5

6

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical

额定电压 /Rated voltage 300V

额定电流 /Rated current 20A

接触电阻 /Contact resistance 20mΩ

绝缘电阻 /Insulation resistance 500MΩ/DC500V

使用线径 /Wire range 22~12AWG

耐电压 /With standing voltage AC 1600V/1 Min

机械性能/Mechanica

扭矩/Torque 1.2Nm(10.6Lb.in)

温度范围 /Temp.Range -40°C~+105°C

瞬时温度 /MAX Soldering +260°C, for 5 Sec

尺寸/Dimensions

间距/Pitch 9.5mm

极数/Poles 2~24p

3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ45C-XXP-1Y-00A	

General Tolerances								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

FOR-0371 Rev.1.0