





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

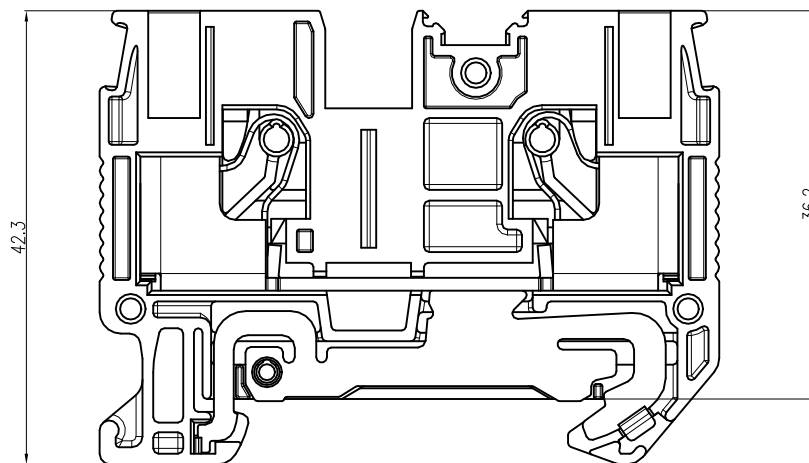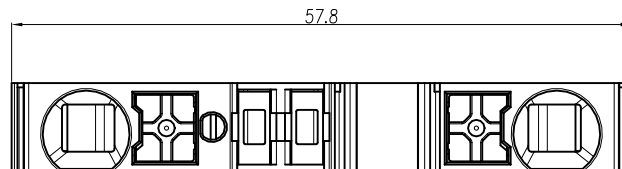

UL/CUL 技术参数 (UL1059)		UL/CUL Technical Data		cULus	
等 级	Use Group	B	C		
额定电压	Rated Voltage [V]	-	-		
耐电压	Withstanding Voltage	2200V/1Min			
接线范围	Wire Range	20-8			
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数 (IEC60947-7-2)					
IEC Technical Data					
过电压类别	Overvoltage Category	III			
污染等级	Contamination Class	3			
额定电压	Rated Voltage [V]	-			
额定冲击电压		8			
Impulse withstand voltagea	[KV]				
导线截面积 Conductor cross section					
单芯	Solid [mm ²]	0.5-10			
柔性导线	flexible [mm ²]	0.5-6			
柔性导线带冷压头		0.5-6			
flexible with ferrule	[mm ²]				
材 料 Material					
绝缘材料	Insulation Material	PA66			
阻燃等级	Imflammability	UL94V-0			
导体材料	Contactor Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Sn Plated			
一般参数 Other Data					
连接点数	connection points	2			
剥线长度	Stripping Length [mm]	10-12			
导轨类型	Type of rail	DIN 35			
螺丝	Screw/扭矩 Torque(Max) [N.m]	--			
工作温度	Operating temperatur [°C]	-40-105			

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to		over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

黄绿色/green-yellow	GUV6-102-PE-00A
颜色/Colour	订货号 /Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUV6-102-PE-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD