





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

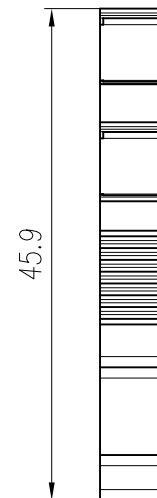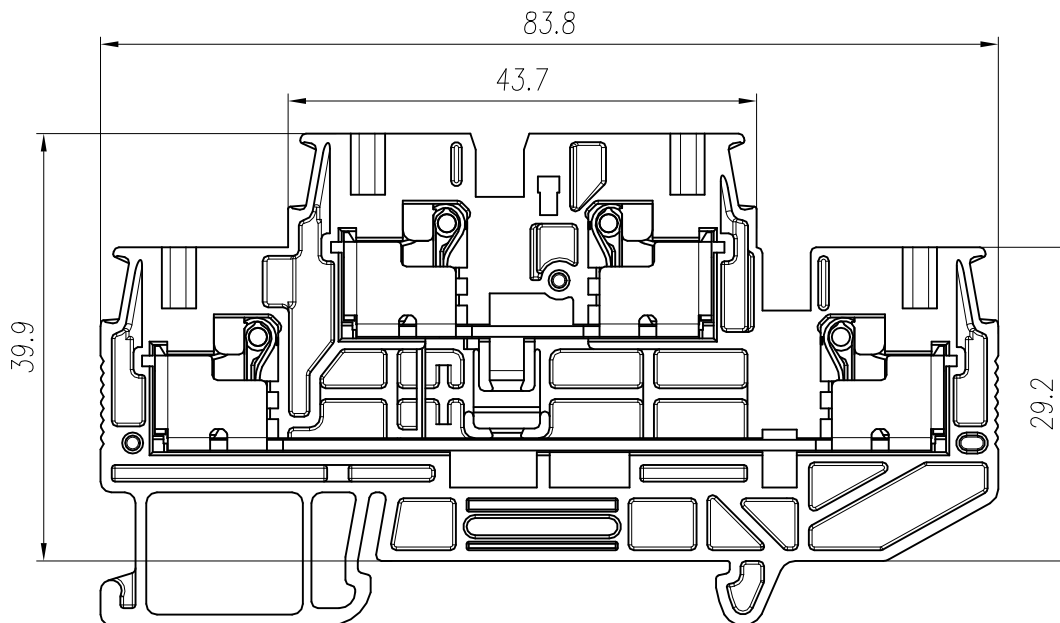

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	28	28	5
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range	24-10		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数 (IEC60947-7-1/2)		IEC 60947-1		
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	500		
额定电流	Rated Current [A]	28		
额定冲击电压	Impulse withstand voltagea [KV]	6		
导线截面积 Conductor cross section				
单芯	Solid [mm²]	0.2-4		
柔性导线	flexible [mm²]	0.2-4		
柔性导线带冷压头	flexible with ferrule [mm²]	0.2-4		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94 V-0		
导体材料	Contacting Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
连接点数	connection points	4		
剥线长度	Stripping Length [mm]	10-12		
导轨类型	Type of rail	DIN 35/DIN 32		
螺丝 Screw/扭矩 Torque(Max) [N·m]		-		
工作温度	Operating temperatur [°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)										—	∇	⊥	红色/Red	GUW4-202-RD-00A
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	黄色/Yellow	GUW4-202-YE-00A			
		绿色/Green	GUW4-202-GN-00A											
		橙色/Orange	GUW4-202-OG-00A											
		蓝色/Blue	GUW4-202-BU-00A											
		灰色/Gray	GUW4-202-GY-00A											
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	颜色/Colour	订货号/Order No.		