

1

2

3




4

5

6

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0			WuBW	25.12.31

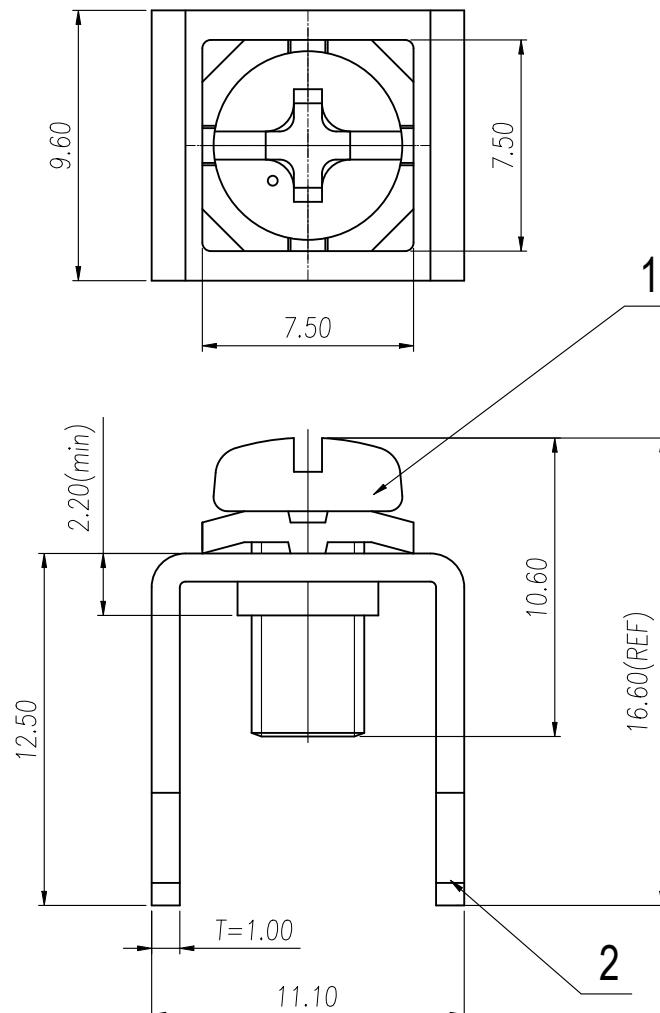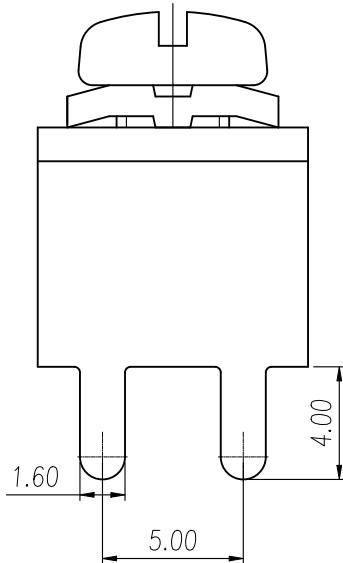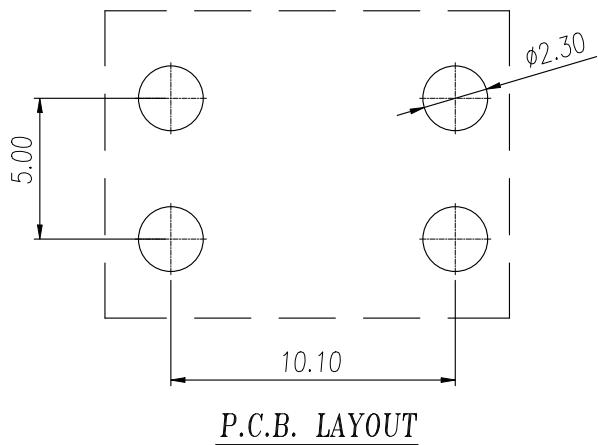

General Tolerances											
variable range	— □ ⊥										
	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200	to 200
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

技术参数 Technical Data			
额定电流 Rated current	40A		
螺丝 Screw	M4		
扭矩 Torque(Max) [N.m]	1.2		
引针尺寸 Pin Dimensions [m.m]	1.0*1.6		
PCB板孔径 PCB Hole Diameter [m.m]	Ø2.3		
符合RoHS环保要求			
2 Pin Header	Copper Alloy	Sn Plated	
1 Screws	Steel	M4 Steel Ni plated with rust preventing oil	
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WuBW	DATE	25.12.31	UNITS	mm	THIRD ANGLE PROJECTION	REV
CHK.	HuHT	DATE	25.12.31	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	25.12.31	SCALE	2:1	DRAWING TYPE: SP-03	REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJK23	

1

2

3

4

5

FOR-0371 Rev.1.0