

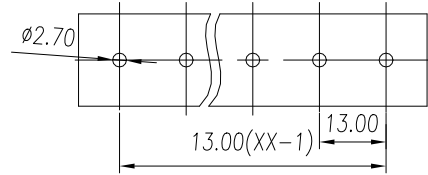


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。 侵犯者将承担侵权责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

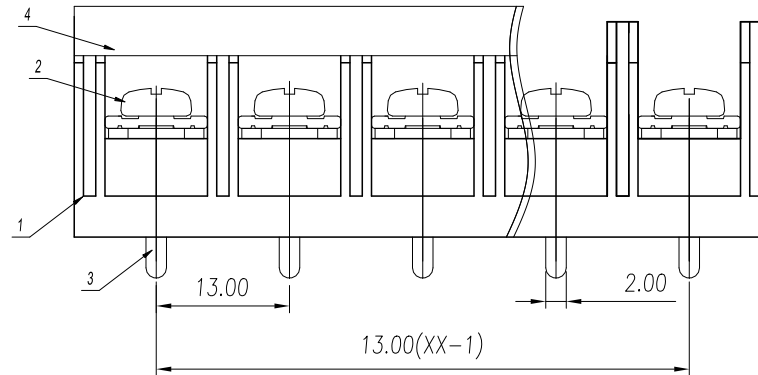

P.C.B. LAYOUT

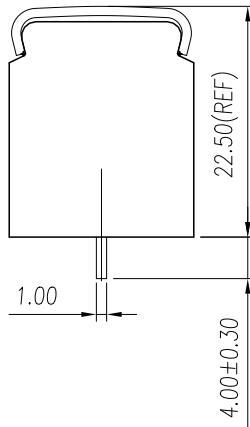

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电 气 性 能 /Electrical		
额定电压 /Rated voltage		600V
额定电流 /Rated current		40A
接触电阻 /Contact resistance		20mΩ
绝缘电阻 /Insulation resistance		500MΩ/DC500V
使用线径 /Wire range		18~10AWG
耐 电 压 /With standing voltage		AC 2200V/1 Min
机 械 性 能 /Mechanica		
扭 矩 /Torque		1.2Nm(10.6Lb.in)
温度范围 /Temp.Range		-40°C~+105°C
瞬时温度 /MAX Soldering		+260°C, for 5 Sec
尺 寸 /Dimensions		
间 距 /Pitch		13mm
极 数 /Poles		2~20p

4	Cover	PC	UL94V-2
3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV	V1

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: WJ78C-XXP-1Y-00A
--	--	-------------------------------

General Tolerances								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1

2

3

4

5

FOR-0371 Rev.1.0