

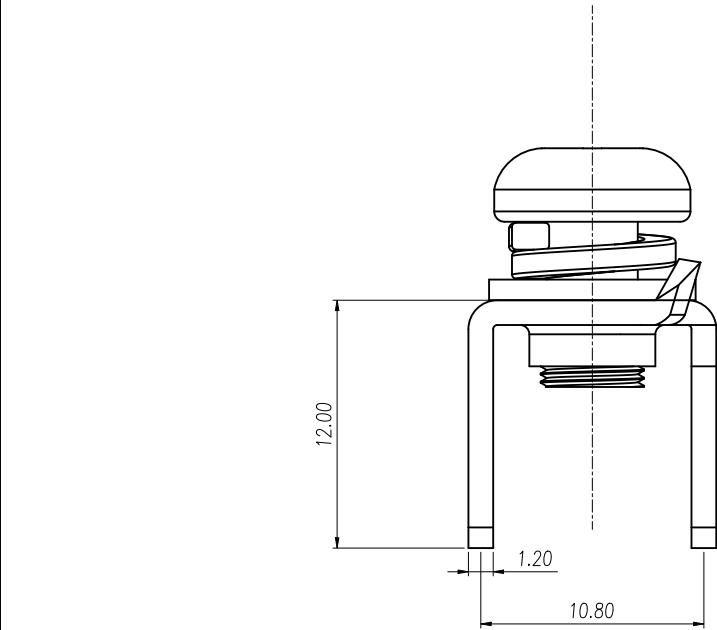
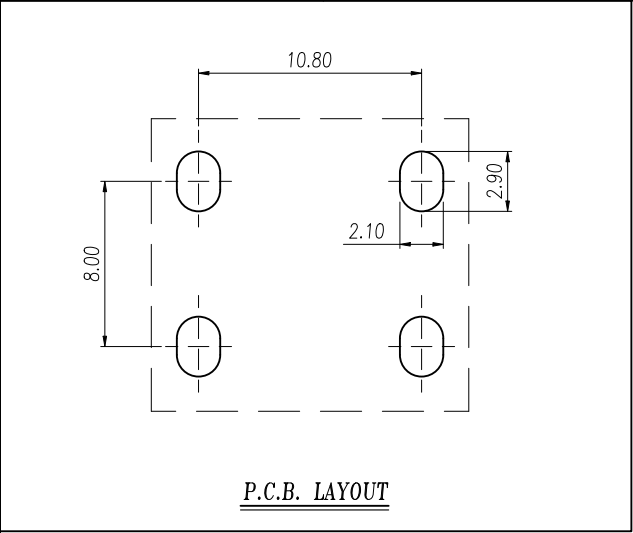


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

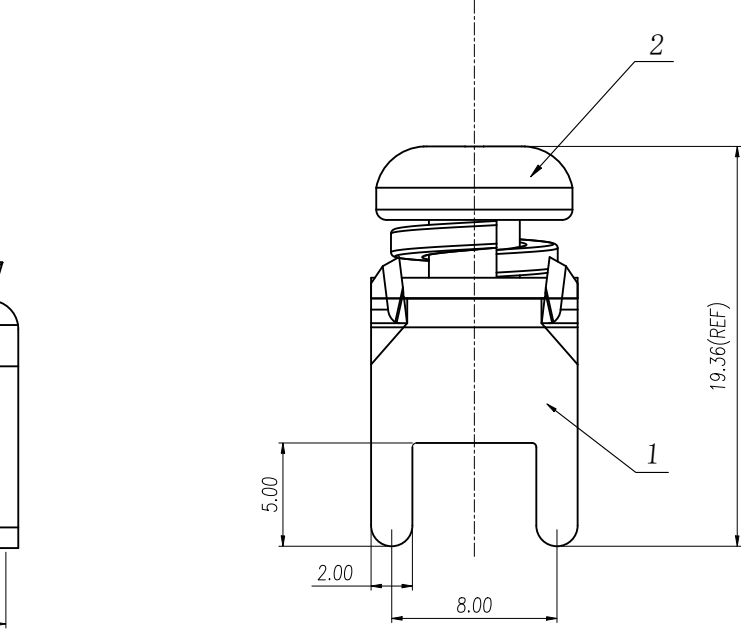

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

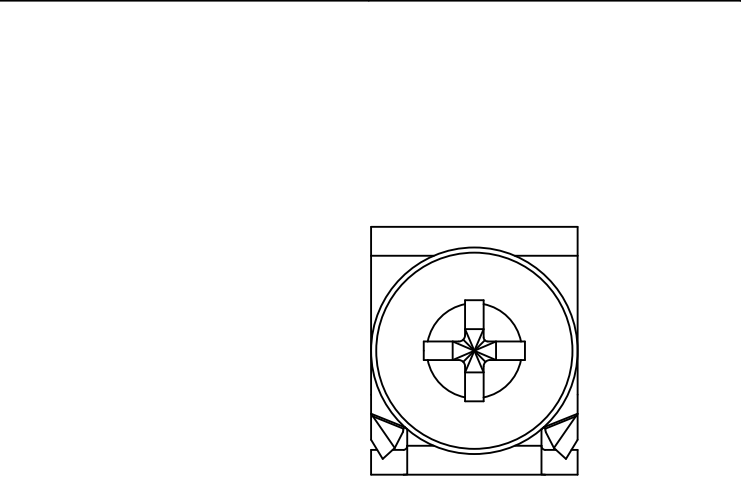

REVISION RECORD				
REV.	ESCRPTION	ECN No.	APPROVED	DATE
V0	新发行		WuBW	25.12.31

技术 参数 Technical Data			
螺丝	Screw	M5.0	
扭矩	Torque(Max)	[N.m]	2.0
引针尺寸	Pin Dimensions	[m.m]	1.2*2.0
PCB板孔径	PCB Hole Diameter	[m.m]	2.1*2.9
符合RoHS环保要求			
2	Screws	Steel	M5 Steel Ni plated with rust preventing oil
1	Header	Copper Alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WuBW	DATE	25.12.31	UNITS	mm	THIRD ANGLE PROJECTION		⌀ ▯	
CHK.	HuHT	DATE	25.12.31	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
APP.	Jason	DATE	25.12.31	SCALE	2:1	DRAWING TYPE: SP-03		REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJK24			