




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

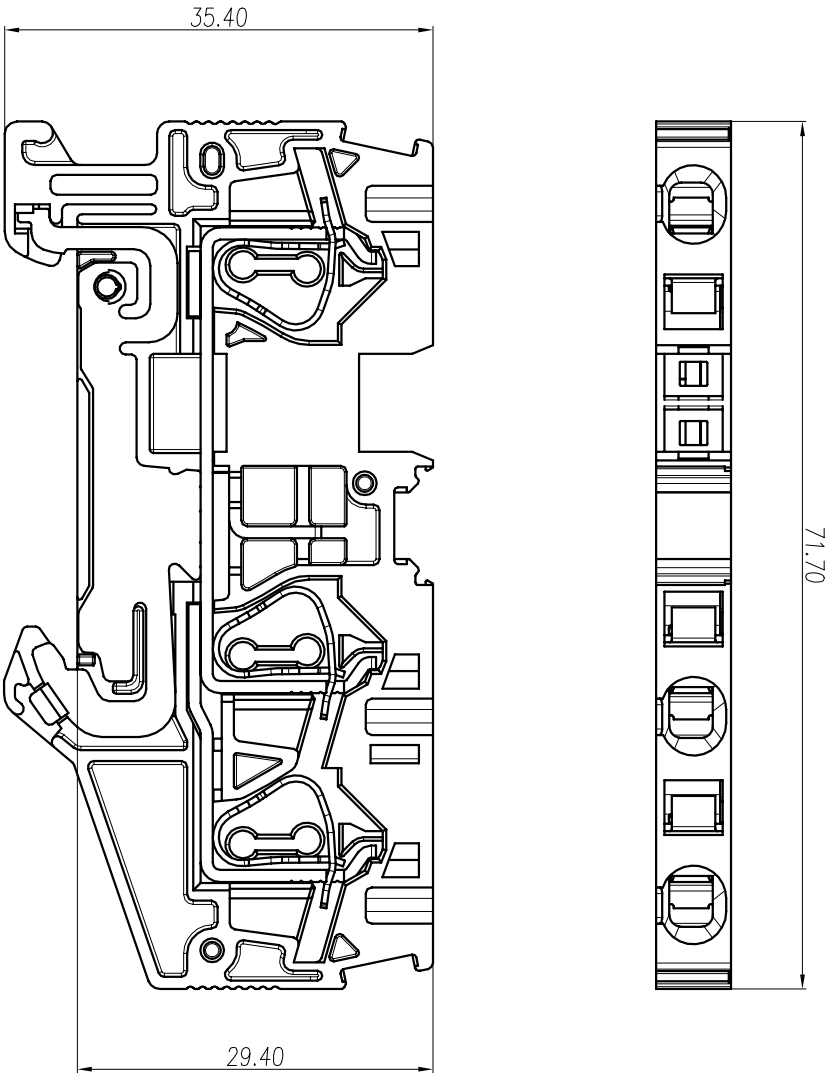

UL/CUL 技术参数 (UL1059)			
UL/CUL Technical Data			
等级	Use Group	B	C
额定电压	Rated Voltage	V	-
耐电压	Withstanding Voltage	2200V/1Min	-
接线范围	Wire Range	24-10	-
单/多芯线	Solid/Stranded	AWG	-
IEC 技术参数 (IEC80947-2)			
IEC Technical Data			
过电压类别	Overvoltage Category	III	-
污染等级	Contamination Class	3	-
额定电压	Rated Voltage	V	-
额定冲击电压	Rated impulse voltage	kV	8
导线横截面积	Conductor cross section	mm ²	0.25-0
单芯	Solid	mm ²	0.25-0
柔性导线	flexible	mm ²	0.2-0
柔性导线带压头	flexible with ferrule	mm ²	0.2-0
材料			
绝缘材料	Insulation Material	PA66	-
阻燃等级	Inflammability	UL94V-0	-
导体材料	Conductor Material	铜合金	-
导体表面镀层	Conductive Coating	镀锡	-
一般参数			
连接点数	connection points	3	-
剥线长度	Stripping Length	mm	8-10
导线类型	Type of rail	DIN 35	-
螺丝	Screw	Torque(N·m)	-
工作温度	Operating temperatur	°C	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
6	10	10	30	30	60	60	100	100	160	160	100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

黄绿色 green-yellow	GUS4-103-PE-00A
颜色/colour	订货号/Order No.

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称/TITLE	GUS4-103-PE-00A				
版本/REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD