



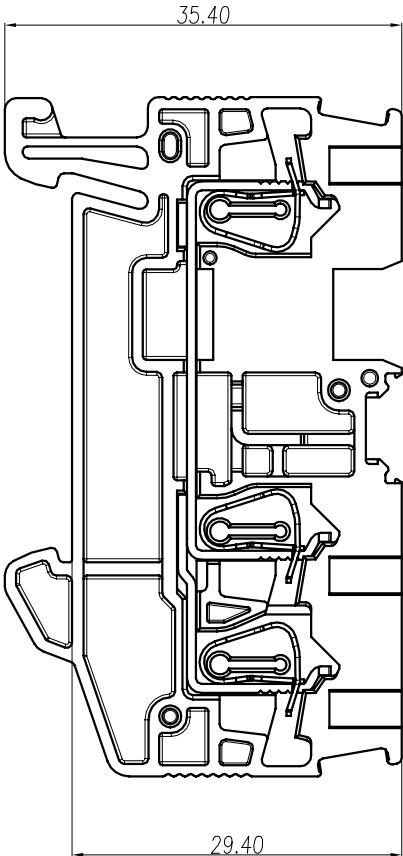

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

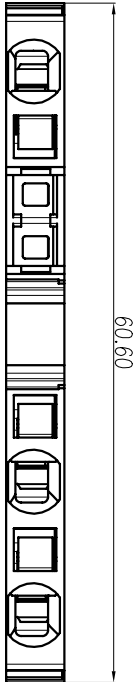

UL/CUL 技术参数 (UL1050)				UL/CUL 技术参数 (UL1050)			
UL/CUL Technical Data				UL/CUL Technical Data			
等级	Use Group	B	C	D			
额定电压	Rated Voltage	M	600	600	600		
额定电流	Rated Current	A	20	20	5		
耐电压	Withstanding Voltage	2200V/1Min					
接线范围	Wire Range	26-12					
单芯芯线	Solid/Stranded	AWG					
IEC 技术参数 (IEC8947-7-12)				IEC 8947-7-1			
IEC Technical Data							
过电压类别	Overvoltage Category	III					
污染等级	Contamination Class	3					
额定电压	Rated Voltage	M				800	
额定电流	Rated Current	A				24	
额定冲击电压	Impulse withstand voltage	KV				8	
导线截面积				Conductor cross section			
单芯	Solid	[mm²]				0.2-4.0	
柔性导线	flexible	[mm²]				0.2-2.5	
柔性导线带冷压头	flexible with ferrule	[mm²]				0.2-2.5	
材料				Material			
绝缘材料				Insulation Material			
阻燃等级				Inflammability			
导体材料				Conductor Material			
导体表面镀层				Conductive Coating			
一般参数				Other Data			
连接点数				connection points			
剥线长度				Stripping Length			
导线类型				Type of rail			
螺丝				Screw/扭矩			
工作温度				Operating temperatur			

linear dimension(tolerances Standard GB/T 14486-2008)									
—									
linear dimension(tolerances Standard GB/T 14486-2008)									
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 10	10 to 100	100 to 0.60	0.60 to 0.10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS2.5-103-XX-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD