




慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD


REV.	DESCRIPTION	ECN No.	APPROVED	DATE

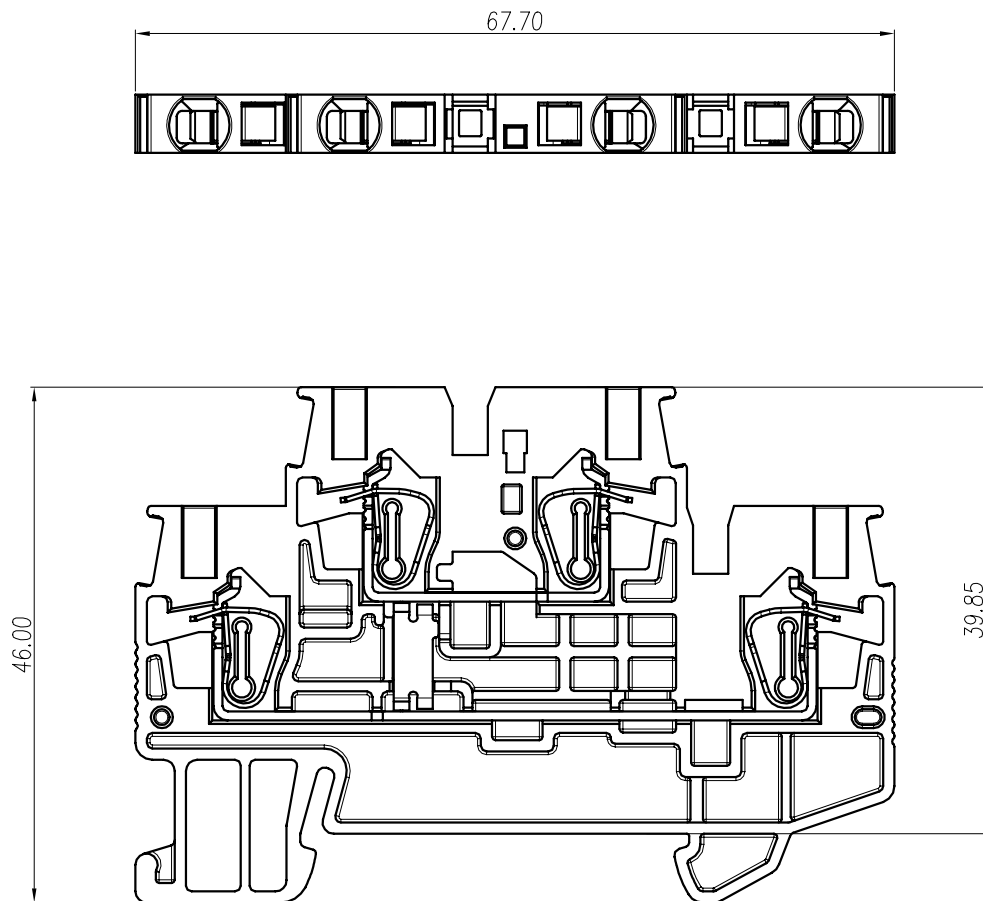

UL/CUL 技术 参数 (UL1059)							
UL/CUL Technical Data							
等 级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	300	300	600			
额定电流	Rated Current [A]	20	20	5			
耐电压	Withstanding Voltage	1600V/1Min					
接线范围	Wire Range	26-12					
单/多芯线	Solid/Stranded [AWG]						
IEC 技术参数 (IEC60947-7-1)							
IEC Technical Data							
过电压类别	Overvoltage Category	III					
污染等级	Contamination Class	3					
额定电压	Rated Voltage [V]	500					
额定电流	Rated Current [A]	22					
额定冲击电压	Impulse withstand voltagea [KV]	6					
导线截面积 Conductor cross section							
单芯	Solid [mm²]	0.2-4					
柔性导线	flexible [mm²]	0.2-2.5					
柔性导线带冷压头	flexible with ferrule [mm²]	0.2-2.5					
材 料 Material							
绝缘材料	Insulation Material	PA66					
阻燃等级	Imflammability	UL94V-0					
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Sn Plated					
一般参数 Other Data							
连接点数	connection points	4					
剥线长度	Stripping Length [mm]	8-10					
导轨类型	Type of rail	DIN 35					
螺丝	Screw/扭矩 Torque(Max) [N.m]	-					
工作温度	Operating temperatur [°C]	-40~105					

linear dimension(Tolerances Standard GB/T 14486-2008)										—	∟	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

黑色/Black	GUS2.5-202-PV-00A
颜色/Colour	订货号 /Order No.

单位 /UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 /THIRD ANGLE PROJECTION	版本 / REV	V0
								
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	GUS2.5-202-PV-00A	