



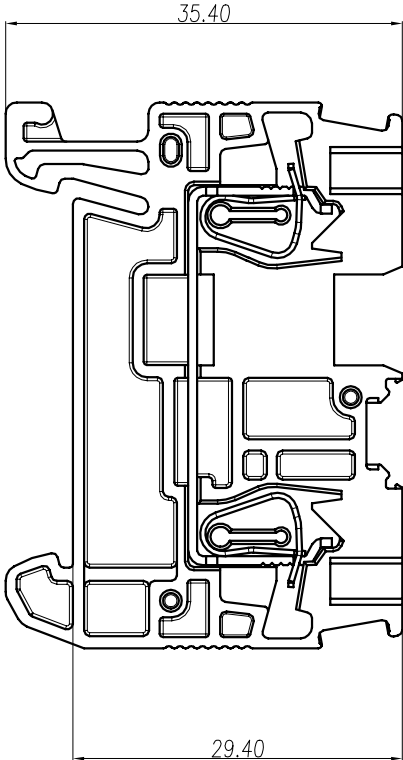

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

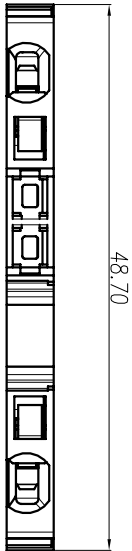

UL/CUL 技术参数 (UL1059)				cFAS				
UL/CUL Technical Data								
等级	Use Group	B	C	D				
额定电压	Rated Voltage	V	300	300	600			
额定电流	Rated Current	A	15	15	5			
耐电压	Withstanding Voltage	1600V/1Min						
接线范围	Wire Range	26-14						
单芯芯线	Solid/Stranded	[AWG]						
IEC 技术参数(IEC8947-7-1)								
IEC Technical Data								
过电压类别	Overvoltage Category	III						
污染等级	Contamination Class	3						
额定电压	Rated Voltage	V					500	
额定电流	Rated Current	A					17.5	
额定冲击电压	Impulse withstand voltage	KV					6	
导线截面积	Conductor cross section							
单芯	Solid	[mm²]					0.2-1.5	
柔性导线	flexible	[mm²]					0.2-1.5	
柔性导线带冷压头	flexible with ferrule	[mm²]					0.2-1.5	
材料								
绝缘材料	Insulation Material	PA66						
阻燃等级	Inflammability	UL94V-0						
导体材料	Conductor Material	铜合金 Copper alloy						
导体表面镀层	Conductive Coating	镀锡 Sn Plated						
一般参数								
Other Data								
连接点数	connection points	2						
剥线长度	Stripping Length	[mm]						8-10
导轨类型	Type of rail							DIN 35
螺丝	Screw/Torque	[Nm]						-
工作温度	Operating temperatur	°C						-40-105

红色/Red	GUS1.5-102-RD-00A
黑色/Black	GUS1.5-102-BK-00A
黄色/Yellow	GUS1.5-102-YE-00A
绿色/Green	GUS1.5-102-GN-00A
橙色/Orange	GUS1.5-102-OG-00A
蓝色/Blue	GUS1.5-102-BU-00A
灰色/Gray	GUS1.5-102-GY-00A

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	over 100 to 0.60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30 0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					版本 / REV
名称 / TITLE					V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					GUS1.5-102-XX-00A