



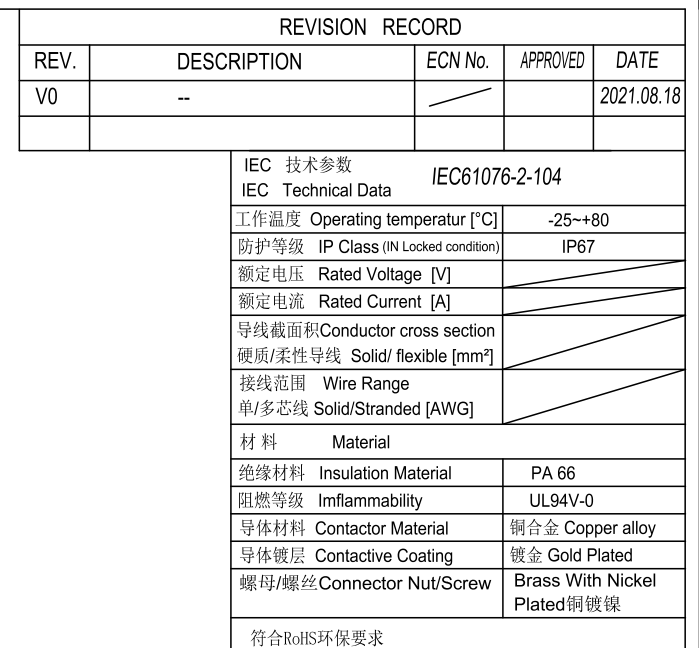

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Wire Range 线范围	24AWG	24AWG	24AWG	26AWG	26AWG
PART NO. 品名 (0.5M):	M08-A03-ST0-M02-BQ4-050	M08-A04-ST0-M02-BQ4-050	M08-B05-ST0-M02-BQ4-050	M08-A06-ST0-M02-BQ4-050	M08-A08-ST0-M02-BQ4-050
Customized. 定制化:					

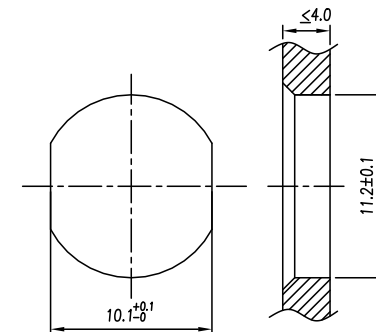

Panel cut-out

G		WIRE	WIRE:UL1061 L=505mm	pcs	X
F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	1
D		Nut	Nut:M11X1.0,Brass With Nickel Plated	pcs	1
C		Housing	M8 Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M8X1.0/M11X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD										PART NO.: M08-AXX-ST0-M02-BQ4-XXX				
NO SPECIFIED TOLERANCE			Cus' P/N:			Order No :		---		Drawing No.:		SP-02-M000XX		
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE			
	6~30	±0.2												
	>30	±2%												
ANGLES			APP.			DATE			SCALE		X:X		文件等级:外部公开	

