







慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

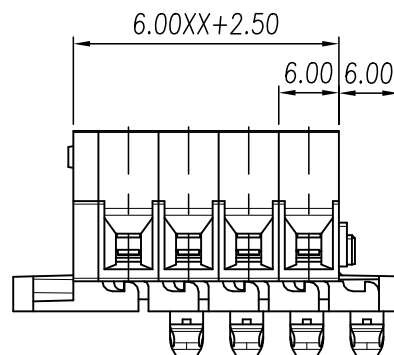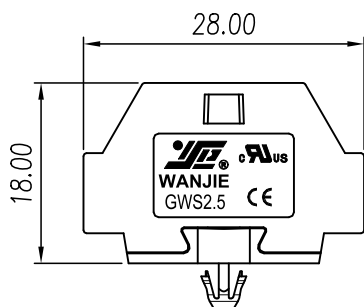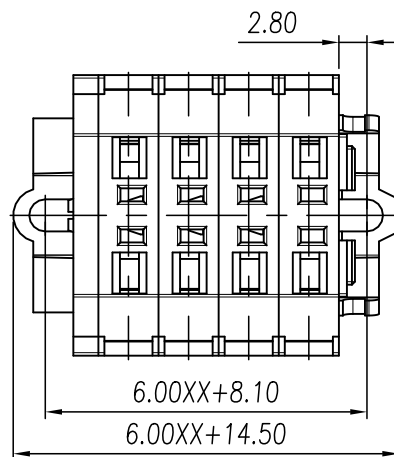

UL/CUL 技术参数(UL1059)
UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	15	15	5
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	28-14		
单/多芯线	Solid/Stranded [AWG]			

IEC 技术参数(IEC60947-7-1)
IEC Technical Data

过电压类别	Overvoltage Category	III
污染等级	Contamination Class	3
额定电压	Rated Voltage [V]	500
额定电流	Rated Current [A]	24
额定冲击电压	Impulse withstand voltagea [KV]	6.0

导线截面积 Conductor cross section

单芯	Solid [mm ²]	0.2-2.5
柔性导线	Flexible [mm ²]	0.2-2.5

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀锡 Sn Plated

一般参数 Other Data

间距	Pitch [mm]	6.0
极数	Poles [P]	02-24
剥线长度	Stripping Length [mm]	8~9
工作温度	Operating temperatur [°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 3:2 第三视角 / THIRD ANGLE PROJECTION 版本 / REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 /
TITLE

GWS2.5J-XXP-1YY-00A