
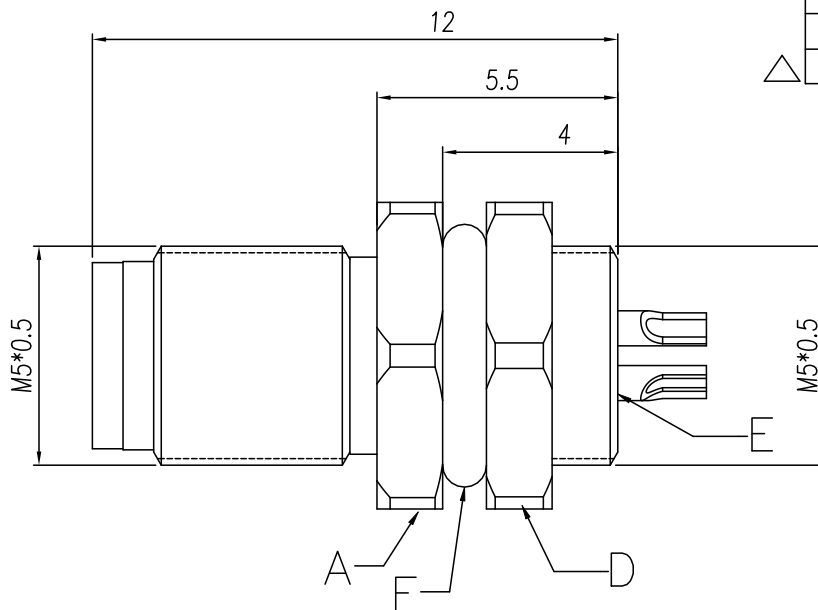


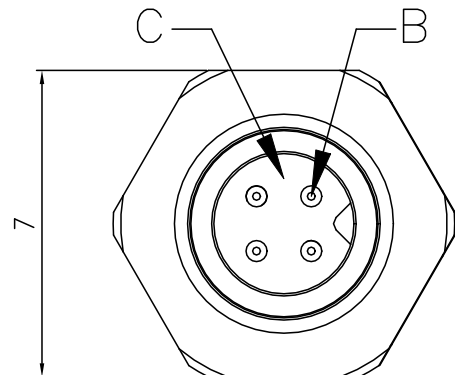


△("E")Notes:Rotating torque:
3.0 kgf/ cm(Max)

Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range线范围	26AWG	26AWG
PART NO.品名:	M05-A03-ST0-M02-BH1	M05-A04-ST0-M02-BH1
Customized.定制化:		

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.25
V1	Add Notes	/		2024.11.25

IEC 技术参数		IEC61076-2-105
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	60
额定电流	Rated Current [A]	1
导线截面积	Conductor cross section	0.14
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	26
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		



Panel cut-out

F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	1
D		Nut	Nut: M5X0.5,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.:(See Table) M05- <u>AXX</u> -ST0-M02-BH1			
NO SPECIFIED TOLERANCE		Cus' P/N:			Order No :	---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE	UNITS	mm	THIRD ANGLE PROJECTION		PAGE
	6~30	±0.2							1 of 1	
	>30	±2%								
ANGLES	±1°		APP.			DATE	SCALE	X:X		文件等级:外部公开