
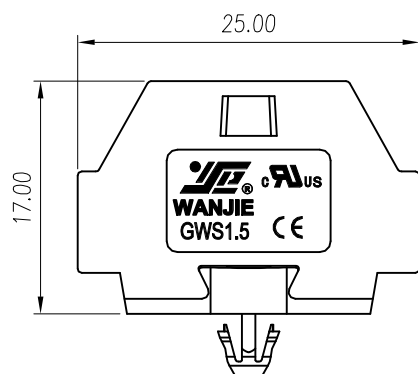


慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

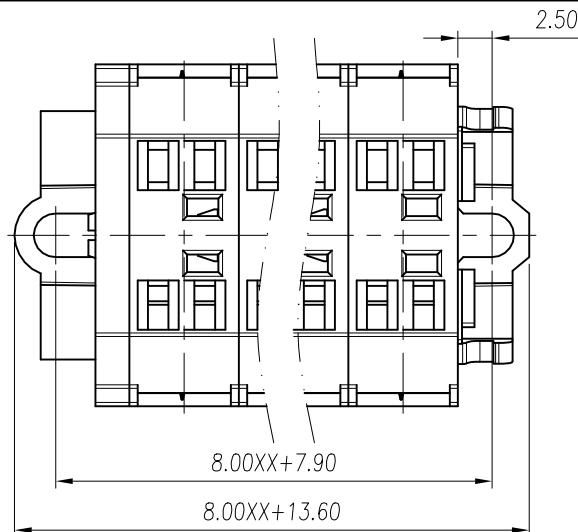

UL/CUL	技术 参数(UL1059)		cUL [®] us		
UL/CUL	Technical Data				
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	300	600
额定电流	Rated Current	[A]	10	10	5
耐电压	Withstanding Voltage		1600V/1Min		
接线范围	Wire Range		28-16		
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数(IEC60947-7-1)					
IEC Technical Data					
过电压类别	Overvoltage Category		III		
污染等级	Contamination Class		3		
额定电压	Rated Voltage	[V]	400		
额定电流	Rated Current	[A]	18		
额定冲击电压			6.0		
Impulse withstand voltagea		[KV]			
导线截面积	Conductor cross section				
单芯	Solid	[mm ²]	0.2-1.5		
柔性导线	Flexible	[mm ²]	0.2-1.5		
材 料	Material				
绝缘材料	Insulation Material		PA66		
阻燃等级	Imflammability		UL94V-0		
导体材料	Contactor Material		铜合金 Copper alloy		
导体镀层	Contactive Coating		镀锡 Sn Plated		
一般参数	Other Data				
间距	Pitch	[mm]	8.0		
极数	Poles	[P]	02-24		
剥线长度	Stripping Length	[mm]	8~9		
工作温度	Operating temperatur	[°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000	over 1000 to 2000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角 / THIRD ANGLE PROJECTION	名称 / TITLE	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							GWS1.5BJ-XXP-1Y-00A		