


P1

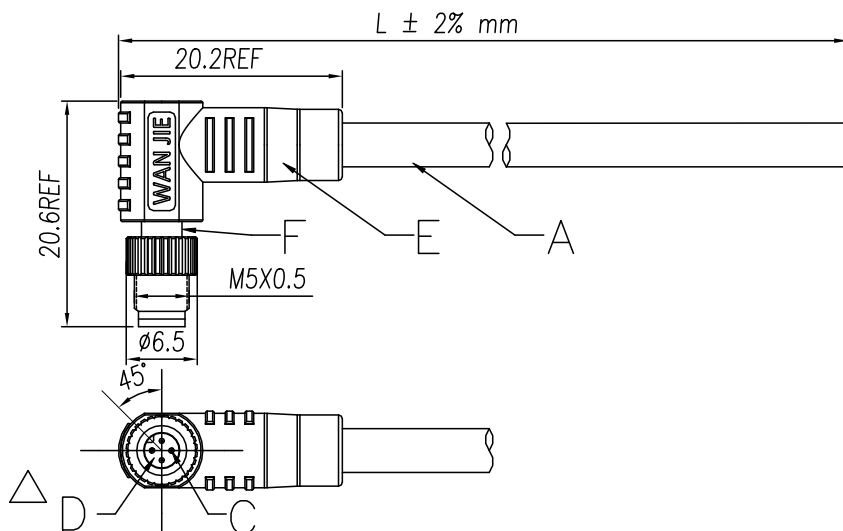

Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range线范围	26AWG	26AWG
PART NO.品名 (0.15m)	M05-A03-RA0-M02-BCC-015	M05-A04-RA0-M02-BCC-015
PART NO.品名 (1.0m)	M05-A03-RA0-M02-BCC-100	M05-A04-RA0-M02-BCC-100
PART NO.品名 (2.0m)	M05-A03-RA0-M02-BCC-200	M05-A04-RA0-M02-BCC-200
PART NO.品名 (3.0m)	M05-A03-RA0-M02-BCC-300	M05-A04-RA0-M02-BCC-300
PART NO.品名 (5.0m)	M05-A03-RA0-M02-BCC-500	M05-A04-RA0-M02-BCC-500
Custiomized. 定制化:		

P1 3Pin Wirelist

1 brown

3 blue

4 black

P1 4Pin Wirelist

1 brown

2 White

3 blue

4 black

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2021.08.25
V1	Changed Angles 45°	—		2022.05.27

IEC 技术参数		IEC61076-2-105
IEC Technical Data		
工作温度 Operating temperature [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	60	
额定电流 Rated Current [A]	1	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.14	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26	
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

E		PUR	Molded With Black PUR	G	5
D		Housing	A-Coding Male,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
A		Cable	UL2464 26AWG Black PVC Jacket	mm	XXX
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M05-AXX-RA0-M02-BCC-XXX	
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No : ---			Drawing No.: SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 	PAGE 1 of 1
	6~30	±0.2	CHK.		DATE	SIZE	A4		
	>30	±2%							
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级:外部公开	