
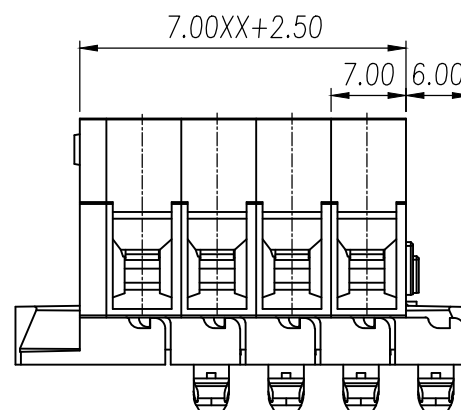
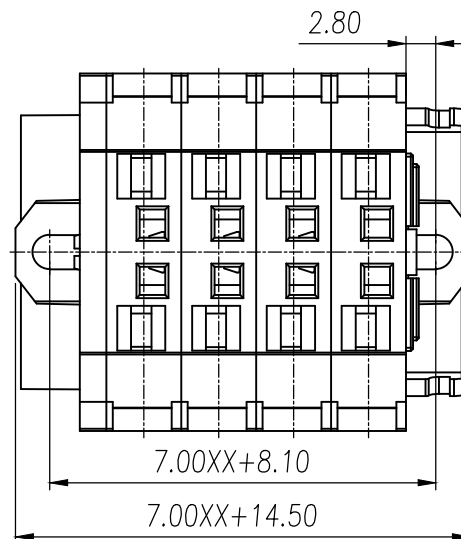
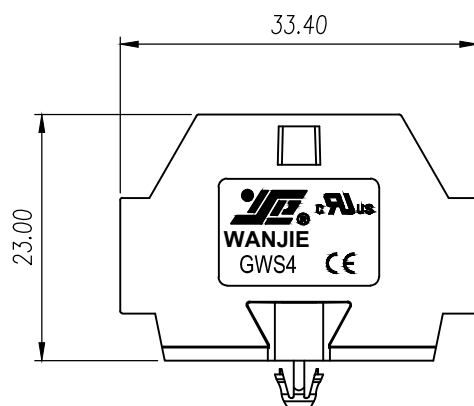


慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD


REV.	DESCRIPTION	ECN No.	APPROVED	DATE

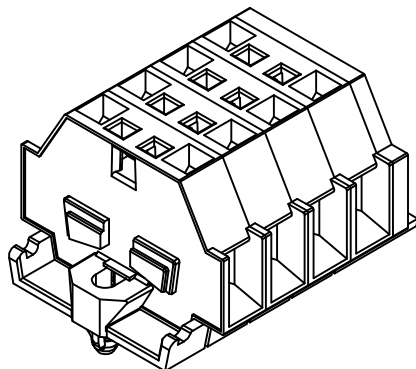

UL/CUL 技术 参数(UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	20	20	5
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	28-12		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数(IEC60947-7-1)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	630		
额定电流	Rated Current [A]	32		
额定冲击电压	Impulse withstand voltagea [KV]	8.0		
导线截面积 Conductor cross section				
单芯	Solid [mm²]	0.2-4.0		
柔性导线	Flexible [mm²]	0.2-4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
间距	Pitch [mm]	7.0		
极数	Poles [P]	02~24		
剥线长度	Stripping Length [mm]	9~10		
工作温度	Operating temperatur [°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:2	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GWS4J-XXP-1YY-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD