




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

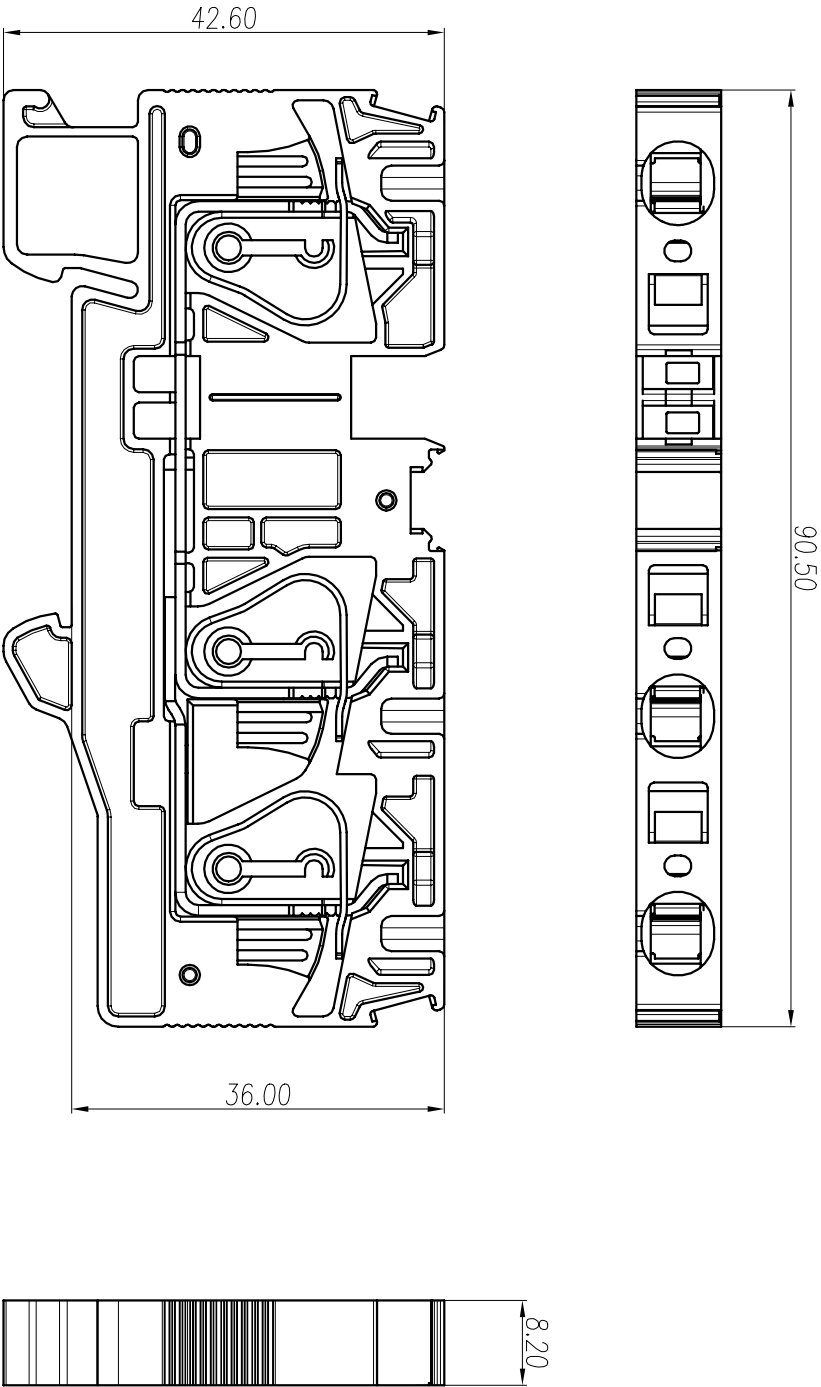

UL/CUL 技术参数 (UL1059)			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage	V	600 600 800
额定电流	Rated Current	A	50 50 5
耐电压	Withstanding Voltage		2200V/1Min
接线范围	Wire Range		
单/多芯线	Solid/Stranded	AWG	24-8
IEC 技术参数 (IEC8947-1)			
IEC Technical Data			
过电压类别	Overvoltage Category		III
污染等级	Contamination Class		3
额定电压	Rated Voltage	V	1000
额定电流	Rated Current	A	41
额定冲击电压			
Impulse withstand voltage	[KV]		8
导线截面积	Conductor cross section		
单芯	Solid	[mm ²]	0.2-10.0
柔性导线	flexible	[mm ²]	0.2-6.0
柔性导线带压头	flexible with ferrule	[mm ²]	0.25-6.0
材料	Material		
绝缘材料	Insulation Material		PA66
阻燃等级	Inflammability		UL94V-0
导体材料	Conductor Material		铜合金 Copper alloy
导体表面镀层	Conductive Coating		镀锡 Sn Plated
一般参数 Other Data			
连接点数	connection points		3
剥线长度	Stripping Length	[mm]	12
导线类型	Type of rail		DN 35
螺丝	Screw/扭矩 Torque(N·m)		-
工作温度	Operating temperatur	[°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)												—		□		┴	
variable range	tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	红色/Red	GLSS-103-RD-004				
												黑色/Black	GLSS-103-BK-004				
												黄色/Yellow	GLSS-103-YE-004				
												绿色/Green	GLSS-103-GH-004				
		over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	over 10 to 100	over 100 to	over 100 to	橙色/Orange	GLSS-103-OG-004					
		6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to	to 10	to 100	to	蓝色/Blue	GLSS-103-BL-004					
		±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	灰色/Gray	GLSS-103-GY-004				
												颜色/Colour	订货号/Order No.				