



Contacts Pin 数	4Pin
D—Coding	 Male Female
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
PART NO.品名:	M12-D04-ST2-M02-BF1
Customized定制化:	

Diagram illustrating a 4x2 grid of nodes. The top row is labeled $P1$ and $P2$. The bottom row is labeled *Shield* and *Shield*. The middle two rows are labeled 1, 2, 3, 4 on both sides. Horizontal lines connect corresponding nodes in each row.

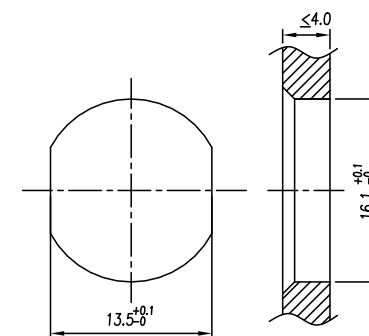

H		Resin	Black epoxy resin for sealing	g	2
G		O-ring	O-ring,FKM Green	pcs	1
F		NUT	NUT M16X1.5, Brass With Nickel Plated	pcs	1
E		O-ring	O-ring,FKM Black	pcs	1
D		Housing	D-Coding Female,Black PA66	pcs	1
C		Housing	D-Coding Male,Black PA66	pcs	1
B		Terminal	Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								PART NO.: M12-D04-ST2-M02-BF1			
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M0XXXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE
	6~30	±0.2									
	>30	±2%									
ANGLES	±1°		CHK.		DATE		SIZE	A4	 1 of 1		
APP.					DATE		SCALE	X:X	文件等级：外部公开		