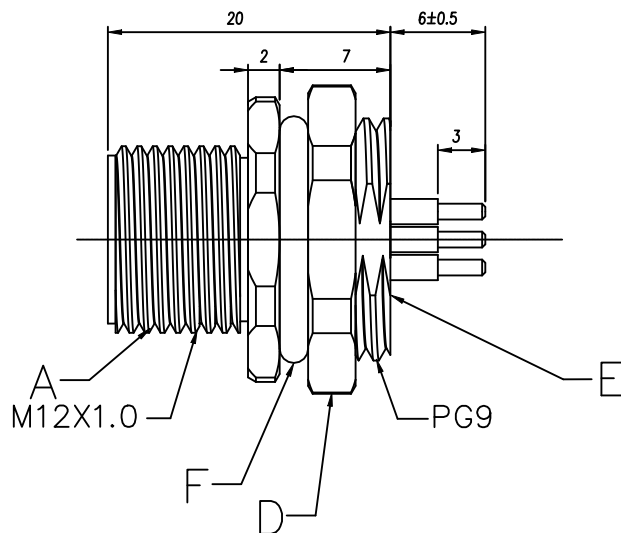
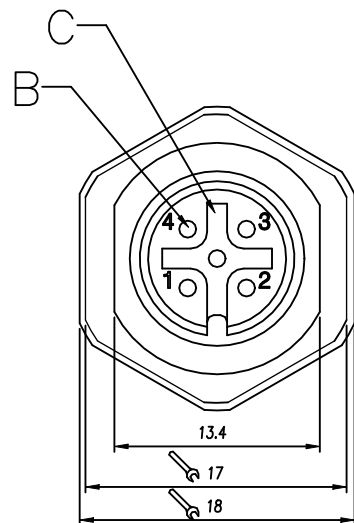


Panel cut-out


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	
额定电流	Rated Current [A]	
导线截面积	Conductor cross section	
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	
单/多芯线	Solid/Stranded [AWG]	
材料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A-Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Pin Size导体直径	1.0mm	1.0mm	1.0mm	0.8mm	0.6mm	0.6mm
PART NO. 品名:	M12-A03-ST0-M01-BH2	M12-A04-ST0-M01-BH2	M12-A05-ST0-M01-BH2	M12-A08-ST0-M01-BH2	M12-A12-ST0-M01-BH2	M12-A17-ST0-M01-BH2
Customized定制化:						

PCB Layout:

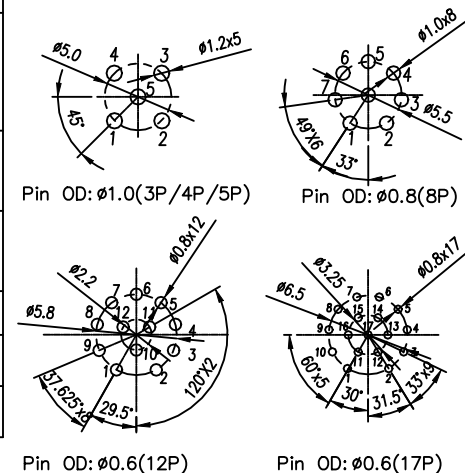

F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut:PG9,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12- <u>AXX</u> -ST0-M01-BH2	
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE	UNITS	mm	THIRD ANGLE PROJECTION		PAGE	
	6~30	±0.2									
		>30	±2%	CHK.		DATE	SIZE	A4			1 of 1
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级:外部公开			