


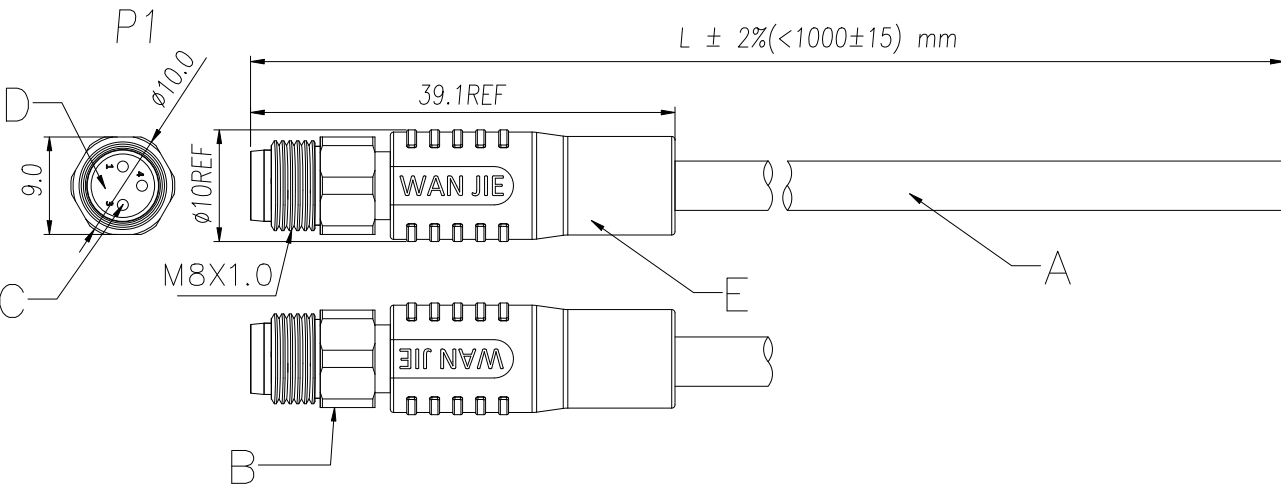

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Wire Range 线范围	24AWG	24AWG	24AWG	26AWG	26AWG
PART NO. 品名 (0.15m)	M08-A03-ST0-M02-SCC-015	M08-A04-ST0-M02-SCC-015	M08-B05-ST0-M02-SCC-015	M08-A06-ST0-M02-SCC-015	M08-A08-ST0-M02-SCC-015
PART NO. 品名 (1m)	M08-A03-ST0-M02-SCC-100	M08-A04-ST0-M02-SCC-100	M08-B05-ST0-M02-SCC-100	M08-A06-ST0-M02-SCC-100	M08-A08-ST0-M02-SCC-100
PART NO. 品名 (2m)	M08-A03-ST0-M02-SCC-200	M08-A04-ST0-M02-SCC-200	M08-B05-ST0-M02-SCC-200	M08-A06-ST0-M02-SCC-200	M08-A08-ST0-M02-SCC-200
PART NO. 品名 (3m)	M08-A03-ST0-M02-SCC-300	M08-A04-ST0-M02-SCC-300	M08-B05-ST0-M02-SCC-300	M08-A06-ST0-M02-SCC-300	M08-A08-ST0-M02-SCC-300
PART NO. 品名 (5m)	M08-A03-ST0-M02-SCC-500	M08-A04-ST0-M02-SCC-500	M08-B05-ST0-M02-SCC-500	M08-A06-ST0-M02-SCC-500	M08-A08-ST0-M02-SCC-500
Customized. 定制化:					

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数 IEC Technical Data		IEC61076-2-104
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	_____
额定电流	Rated Current [A]	_____
导线截面积	Conductor cross section	_____
硬质/柔性导线	Solid/ flexible [mm²]	_____
接线范围	Wire Range	_____
单/多芯线	Solid/Stranded [AWG]	_____
材料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	不锈钢 Stainless steel
符合RoHS环保要求		

M08-X XX-ST0-M02-SCC-XXX

Coding: A, B Cable Length L:
Pin Number: 03, 04, 05, 050=0.5m; 100=1.0m; 10M=10m;

E		PUR	Molded With Black PUR	G	5
D		Housing	Housing Male ,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M8X1.0,Stainless steel	pcs	1
A		Cable	UL 2464 AWG Black PVC Jacket	mm	L1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M08-XXX-ST0-M02-SCC-XXX				
NO SPECIFIED TOLERANCE				Cus' P/N:		Order No : ---			Drawing No.:		SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS		mm	THIRD ANGLE PROJECTION 		PAGE	
	6~30	±0.2	CHK.		DATE	SIZE		A4			1 of 2	
		>30	±2%	APP.		DATE	SCALE		X:X	文件等级: 外部公开		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2021.08.18

3Pin

P1	Wirelist
1	brown
3	blue
4	black

4Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black

5Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black
5	grey

8Pin

P1	Wirelist
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red

6Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black
5	grey
6	pink

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								PART NO.: M08-XXX-ST0-M02-SCC-XXX			
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE
	6~30	±0.2	CHK.		DATE		SIZE	A4		2 of 2	
	>30	±2%									
ANGLES		±1°	APP.		DATE		SCALE	X:X	文件等级:外部公开		