



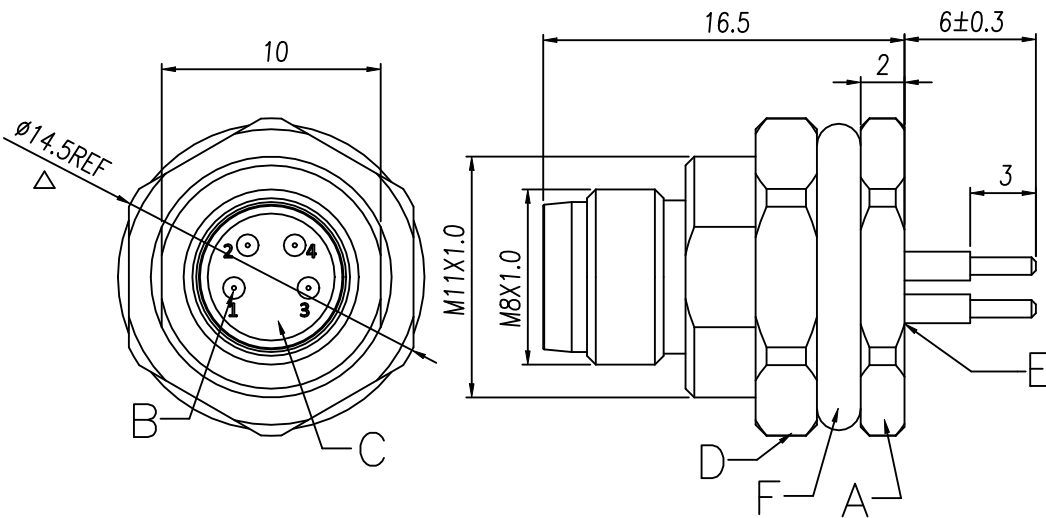

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.7mm	0.6mm
PART NO. 品名:	M08-A03-ST0-M01-BQ4	M08-A04-ST0-M01-BQ4	M08-B05-ST0-M01-BQ4	M08-A06-ST0-M01-BQ4	M08-A08-ST0-M01-BQ4
Customized 定制化:					

PCB Layout:

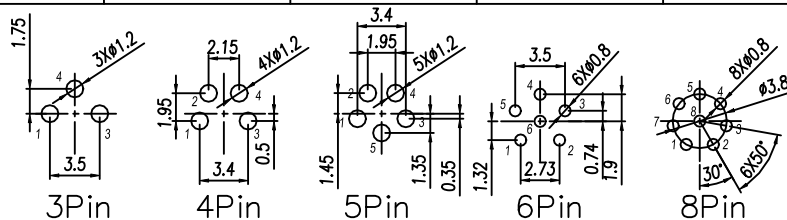


F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	1
D		Nut	Nut:M11X1.0,Brass With Nickel Plated	pcs	1
C		Housing	M8 Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M8X1.0/M11X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数 IEC Technical Data		IEC61076-2-104	
工作温度 Operating temperatur [°C]	-25~+80		
防护等级 IP Class (IN Locked condition)	IP67		
额定电压 Rated Voltage [V]			
额定电流 Rated Current [A]			
导线截面积 Conductor cross section			
硬质/柔性导线 Solid/ flexible [mm²]			
接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]			
材料 Material			
绝缘材料 Insulation Material	PA 66		
阻燃等级 Imflammability	UL94V-0		
导体材料 Contactor Material	铜合金 Copper alloy		
导体镀层 Contactive Coating	镀金 Gold Plated		
螺母/螺丝 Connector Nut/Screw	镀金 With Nickel Plated铜镀镍		
符合RoHS环保要求			

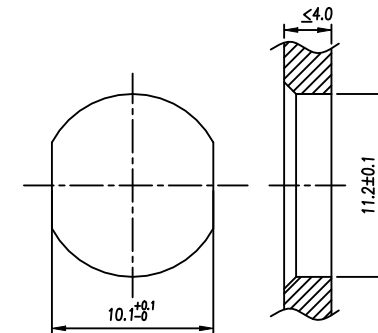

Panel cut-out

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M08-AXX-ST0-M01-BQ4	
NO SPECIFIED TOLERANCE		Cus' P.I.N:	Order No: ---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5-6	±0.1	DES.	Jun	DATE	UNITS	mm
	6-30	±0.2	CHK.		DATE	SIZE	A4
	>30	±2%	APP.		DATE	SCALE	X:X
ANGLES	±1°						文件等级: 外部公开