


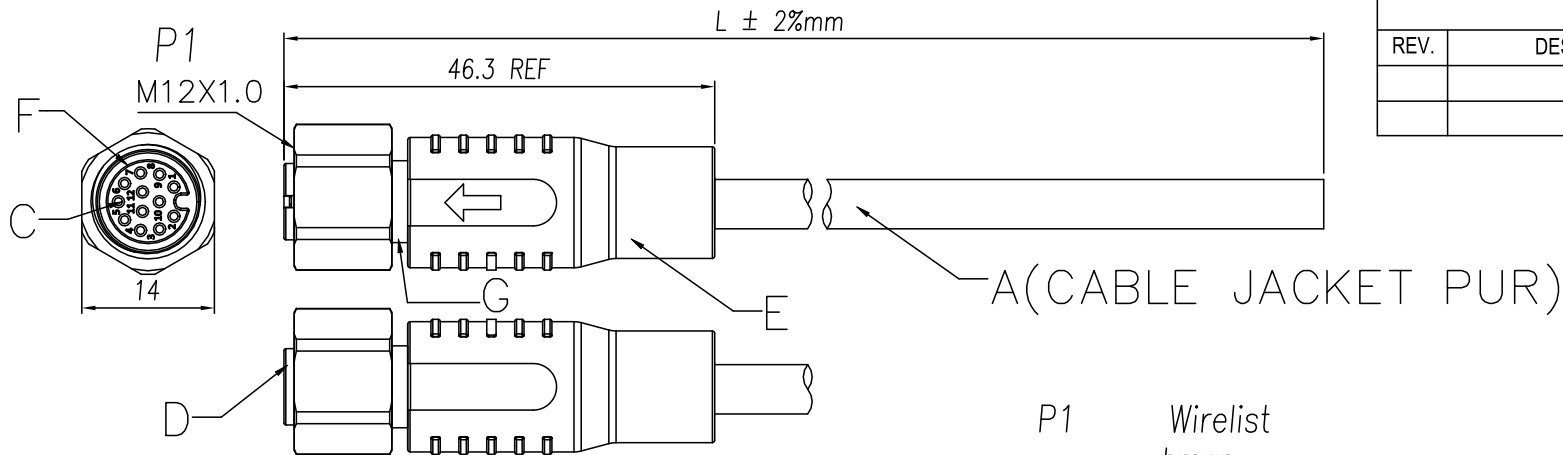

Contacts Pin 数	12Pin
A-Coding	
Rated Current 额定电流	1.5A
Rated Voltage 额定电压	30V
Wire Range线范围	26AWG
PART NO.品名: (1M)	M12-A12-ST2-F02-SCR-100N
PART NO.品名: (2M)	M12-A12-ST2-F02-SCR-200N
PART NO.品名: (3M)	M12-A12-ST2-F02-SCR-300N
PART NO.品名: (5M)	M12-A12-ST2-F02-SCR-500N
Customized.定制化	

P1	Wirelist
1	brown
2	blue
3	white
4	green
5	pink
6	yellow
7	black
8	grey
9	red
10	violet
11	grey/pink
12	red/blue
Shield	Braid

REVISION RECORD				
REV.	DESCPTION	ECN No.	APPROVED	DATE
ET PUR)		IEC 技术参数 IEC Technical Data		
		IEC61076-2-101		
		工作温度 Operating temperatur [°C]		-25~+80
		防护等级 IP Class (IN Locked condition)		IP67
		额定电压 Rated Voltage [V]		30
		额定电流 Rated Current [A]		1.5
		导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		0.14
		接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		26
		材 料 Material		
		绝缘材料 Insulation Material		PA 66
		阻燃等级 Imflammability		UL94V-0
		导体材料 Contactor Material		铜合金 Copper alloy
		导体镀层 Contactive Coating		镀金 Gold Plated
		螺母/螺丝Connector Nut/SCCew		不锈钢 Stainless steel
		符合RoHS环保要求		

G		Pipe	Shield Pipe,Brass With Nickel Plated	pcs	1
F		O-ring	O-ring,FKM Green	pcs	1
E		TPU	Molded With Black TPU	G	8
D		Housing	A-Coding Female 12PIN,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	12
B		SCCew	SCCew M12 X1.0,Stainless steel	pcs	1
A		Cable	UL TYPE 26AWG X12C+AL+Braid Black PUR Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 DeSCCption	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A12-ST2-F02-SCR-XXXX		
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No :		---	Drawing No.:	SP-02-MOXXXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION
	6~30	±0.2	CHK.		DATE	SIZE	A4	PAGE
	>30	±2%	APP.		DATE	SCALE	X:X	1 of 1
ANGLES	±1°				DATE	SCALE	X:X	文件等级:外部公开