


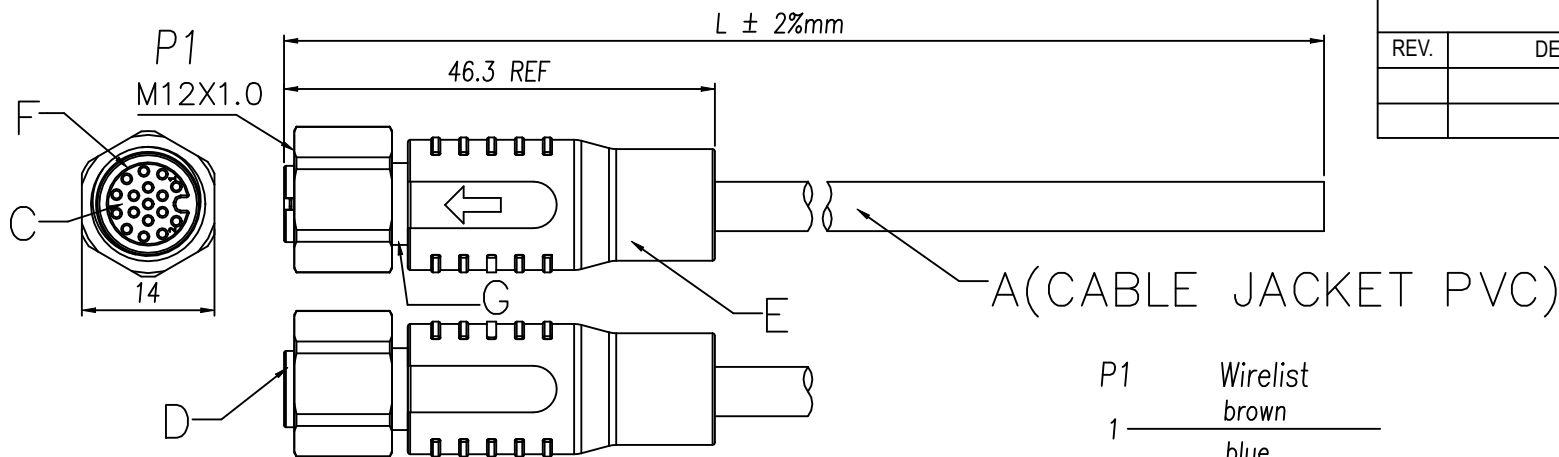

Contacts Pin 数	17Pin
A-Coding	
Rated Current 额定电流	1.5A
Rated Voltage 额定电压	30V
Wire Range线范围	26AWG
PART NO. 品名: (1M)	M12-A17-ST2-F02-SCC-100
PART NO. 品名: (2M)	M12-A17-ST2-F02-SCC-200
PART NO. 品名: (3M)	M12-A17-ST2-F02-SCC-300
PART NO. 品名: (5M)	M12-A17-ST2-F02-SCC-500
Customized.定制化	

P1	Wirelist
1	brown
2	blue
3	white
4	green
5	pink
6	yellow
7	black
8	grey
9	red
10	violet
11	grey/pink
12	red/blue
13	white/green
14	brown/green
15	white/yellow
16	yellow/brown
17	white/grey
Shield	Braid

REVISION RECORD				
REV.	DESCPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	30	
额定电流 Rated Current [A]	1.5	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.14	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26	
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/SCCew	不锈钢 Stainless steel	
符合RoHS环保要求		

G		Pipe	Shield Pipe,Brass With Nickel Plated	pcs	1
F		O-ring	O-ring,FKM Green	pcs	1
E		TPU	Molded With Black TPU	G	8
D		Housing	A-Coding Female 17PIN,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	17
B		SCCew	SCCew M12 X1.0,Stainless steel	pcs	1
A		Cable	UL TYPE 26AWG X17C+AL+Braid Black PVC Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 DeSCCption	单位 Unit	用量 Qty

			慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: M12-A17-ST2-F02-SCC-XXXX		
NO. SPECIFIED TOLERANCE			Cus' P/N:		Order No.:		---		Drawing No.:	SP-02-MOXXXX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 		PAGE
	6-30	±0.2	CHK.	DATE	DATE	SIZE	A4			1 of 1
	>30	±2%								
ANGLES	±1°		APP.	DATE		SCALE	X:X		文件等级:外部公开	