


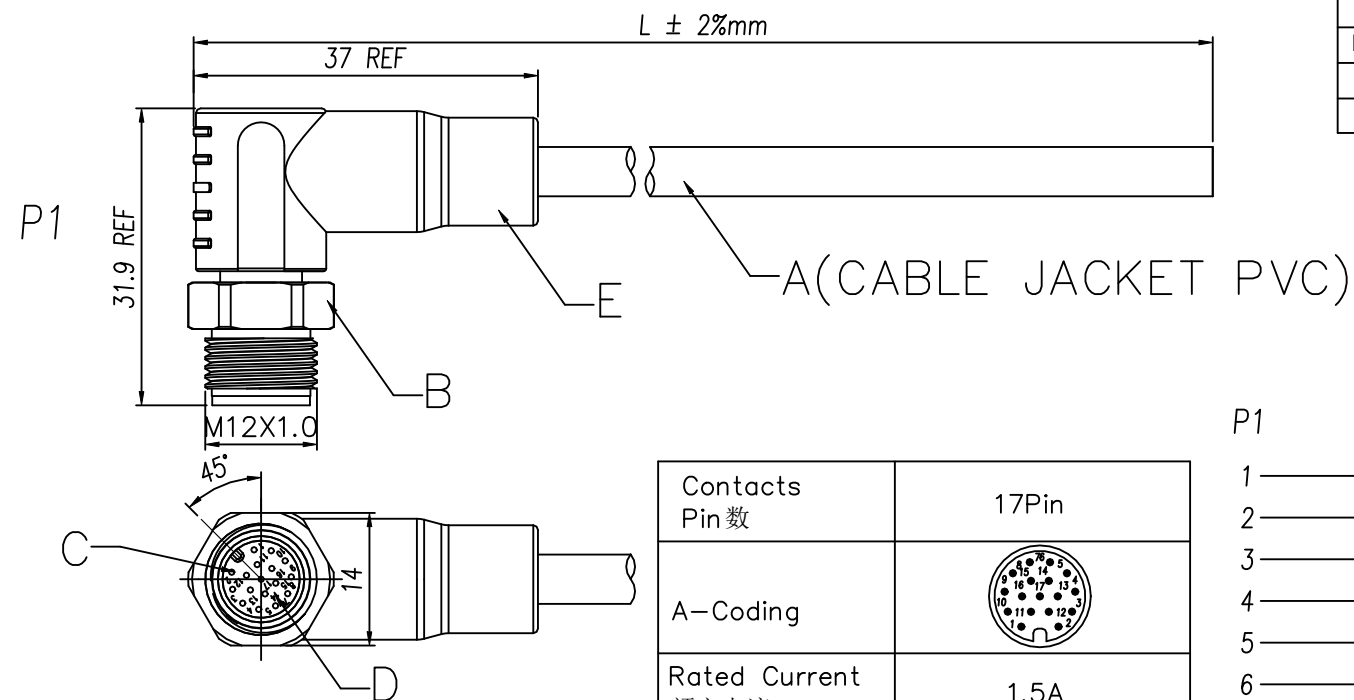

Contacts Pin 数	17Pin
A-Coding	
Rated Current 额定电流	1.5A
Rated Voltage 额定电压	30V
Wire Range线范围	26AWG
PART NO. 品名: (1M)	M12-A17-RA0-M02-SCC-100N
PART NO. 品名: (2M)	M12-A17-RA0-M02-SCC-200N
PART NO. 品名: (3M)	M12-A17-RA0-M02-SCC-300N
PART NO. 品名: (5M)	M12-A17-RA0-M02-SCC-500N
Customized.定制化	

P1	Wirelist
1	brown
2	blue
3	white
4	green
5	pink
6	yellow
7	black
8	grey
9	red
10	violet
11	grey/pink
12	red/blue
13	white/green
14	brown/green
15	white/yellow
16	yellow/brown
17	white/grey

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数 IEC Technical Data		IEC61076-2-101
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	30	
额定电流 Rated Current [A]	1.5	
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.14	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26	
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Stainless steel 不锈钢	
符合RoHS环保要求		

E		TPU	Molded With Black TPU		G	8
D		Housing	A-Coding Male 17PIN,Black PA66		pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated		pcs	17
B		Screw	Screw M12 X1.0,Stainless steel		pcs	1
A		Cable	UL TYPE 26AWG X17C Black PVC Jacket		mm	L
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description		单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: M12-A17-RA0-M02-SCC-XXXX			
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No :		---		Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 	PAGE 1 of 1
	6~30	±0.2	CHK.		DATE	SIZE	A4		
	>30	±2%	APP.		DATE	SCALE	X:X		
ANGLES	±1°				DATE	SCALE	X:X 文件等级:外部公开		