
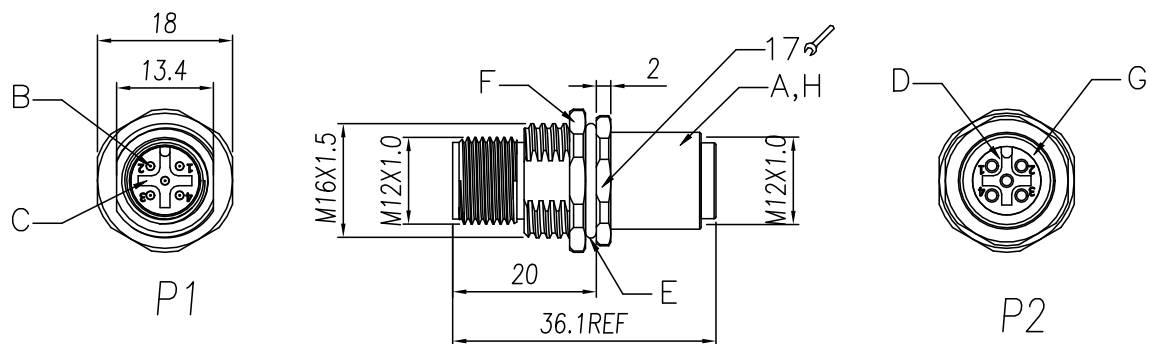








REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	
额定电流	Rated Current [A]	
导线截面积	Conductor cross section	
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contacto Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated 铜镀镍
符合RoHS环保要求		

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin
A-Coding	 Male Female	 Male Female	 Male Female	 Male Female
Rated Current 额定电流	4A	4A	4A	2A
Rated Voltage 额定电压	250V	250V	60V	30V
PART NO.品名:	M12-A03-ST2-M02-BF1	M12-A04-ST2-M02-BF1	M12-A05-ST2-M02-BF1	M12-A08-ST2-M02-BF1
Customized定制化:				

Wirelist

P1	P2
1	1
2	2
3	3
...	...
Shield	Shield

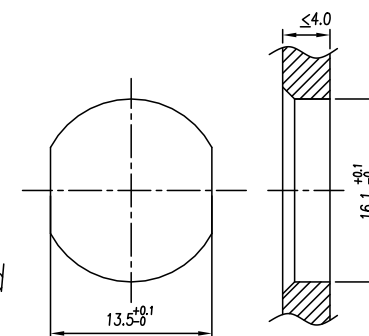

Panel cut-out

H	Resin	Black epoxy resin for sealing	g	2	
G	O-ring	O-ring,FKM Green	pcs	1	
F	NUT	NUT M16X1.5, Brass With Nickel Plated	pcs	1	
E	O-ring	O-ring,FKM Black	pcs	1	
D	Housing	A-Coding Female,Black PA66	pcs	1	
C	Housing	A-Coding Male,Black PA66	pcs	1	
B	Terminal	Terminal ,Brass With Gold Plated	pcs	X	
A	Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1	
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-AXX-ST2-M02-BF1	
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No :		---	Drawing No.:	SP-02-M0XXXX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm
	6-30	±0.2	CHK.		DATE	SIZE	A4
	>30	±2%	APP.		DATE	SCALE	X:X
ANGLES	±1°				DATE	文件等级:外部公开	
						THIRD ANGLE PROJECTION	PAGE
							1 of 1