


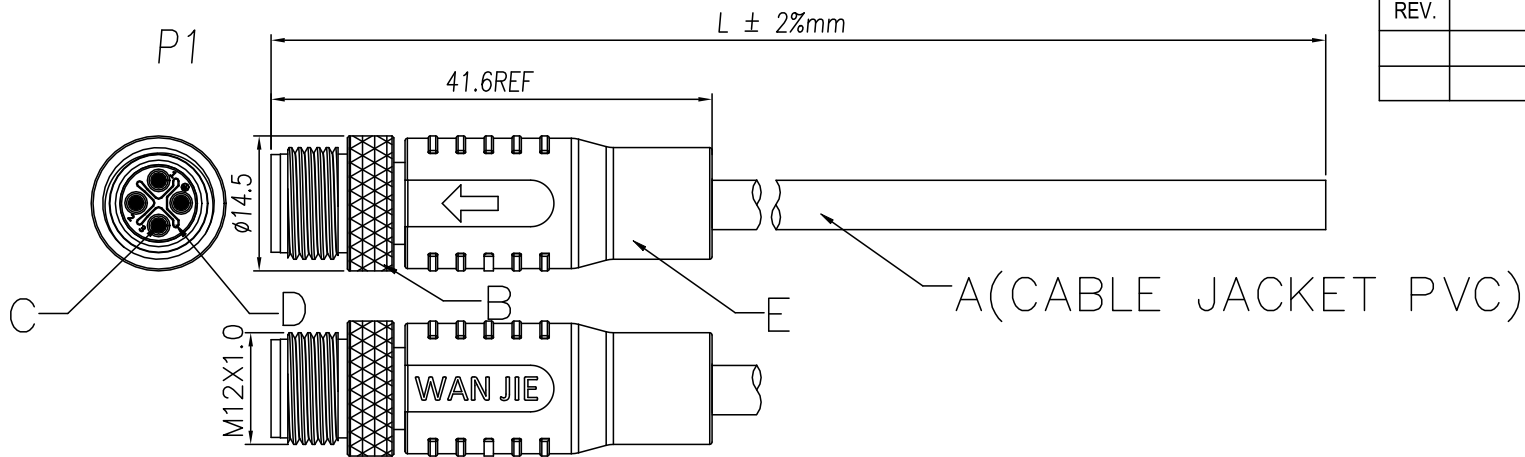

Contacts Pin 数	4Pin	3Pin
S-Coding		
Rated Current 额定电流	12A	12A
Rated Voltage 额定电压	300V	300V
Wire Range线范围	16AWG	16AWG
PART NO.品名: (1m)	M12-S04-ST0-M02-BCC-100	M12-S03-ST0-M02-BCC-100
PART NO.品名: (2m)	M12-S04-ST0-M02-BCC-200	M12-S03-ST0-M02-BCC-200
PART NO.品名: (3m)	M12-S04-ST0-M02-BCC-300	M12-S03-ST0-M02-BCC-300
PART NO.品名: (5m)	M12-S04-ST0-M02-BCC-500	M12-S03-ST0-M02-BCC-500
PART NO.品名: (0. 4m)	M12-S04-ST0-M02-BCC-040	M12-S03-ST0-M02-BCC-040
Customized.定制化		

L=400±15mm

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-111
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	300
额定电流	Rated Current [A]	12
导线截面积	Conductor cross section	1.5
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	16
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactore Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

4PIN Wirelist		3PIN Wirelist	
P1		P1	
1	brown	1	brown
2	white	3	blue
3	blue	4(PE)	black
4(PE)	black		

E	TPU	Molded With Black TPU	G	8
D	Housing	S-Coding Male,Black PA66	pcs	1
C	Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B	Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
A	Cable	UL 2464 16AWG X4C Black PVC Jacket(300V)	mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit
				用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-SXX-ST0-M02-BCC-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No :	---	Drawing No.:	SP-02-M00XXX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm
	6-30	±0.2	CHK.		DATE	SIZE	A4
	>30	±2%	APP.		DATE	SCALE	X:X
ANGLES	±1°					文件等级: 外部公开	
						THIRD ANGLE PROJECTION	PAGE
							1 of 1