

1

2

3





4

5

6

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	24.09.29

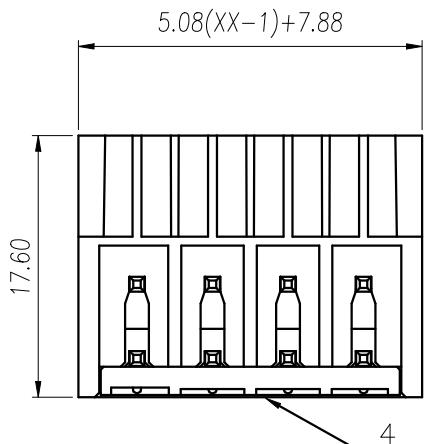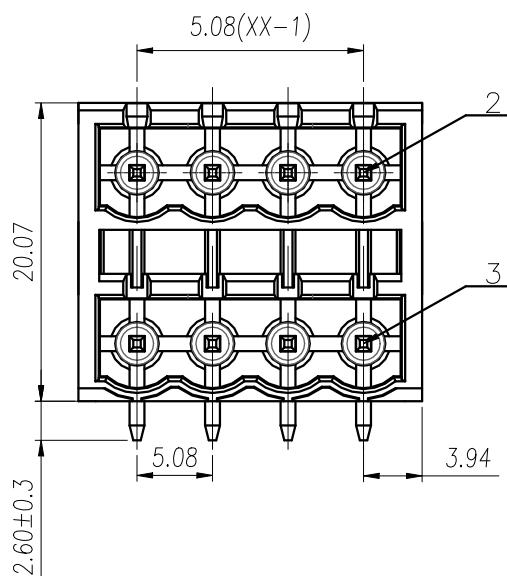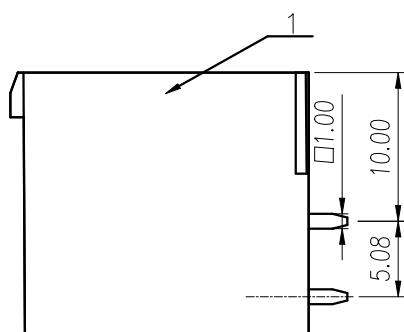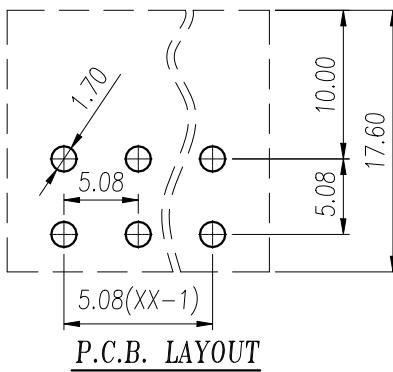

3

4

5

FOR-0371 Rev.1.0

General Tolerances											
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	over 100
		to 10	to 30	to 60	to 100	to 160	to 10	to 100	to 100	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

UL/CUL	技术参数			
UL/CUL	Technical Data			
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数	IEC61984			
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/ flexible [mm ²]			
一般参数	Other Data			
间距	Pitch /极数 Poles [mm] / [P]	5.08 / 2*02~2*24		
工作温度	Operating temperature [°C]	-40~130		
焊接方法	Soldering method	Reflow Soldering		
符合RoHS环保要求				

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cover	LCP	UL94V-0
3	Pin 2	Copper Alloy	Sn Plated
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
DES.	WangP	DATE	24.09.29
CHK.	YangHJ	DATE	24.09.29
APP.	JASON	DATE	24.09.29
		UNITS	mm
		SIZE	A4
		SCALE	
		THIRD ANGLE PROJECTION	
DES.	WangP	DATE	24.09.29
CHK.	YangHJ	DATE	24.09.29
APP.	JASON	DATE	24.09.29
		TYPE: CUSTOMER DRAWING	SHEET 1 of 1
		DRAWING TYPE: SP-03	REV V0
		PART NO.:	
			WJ2EDGRHB-THR-5.08-2*XXP-1Y-00A

 慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD