

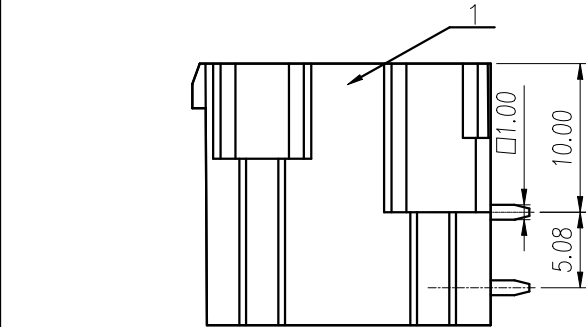
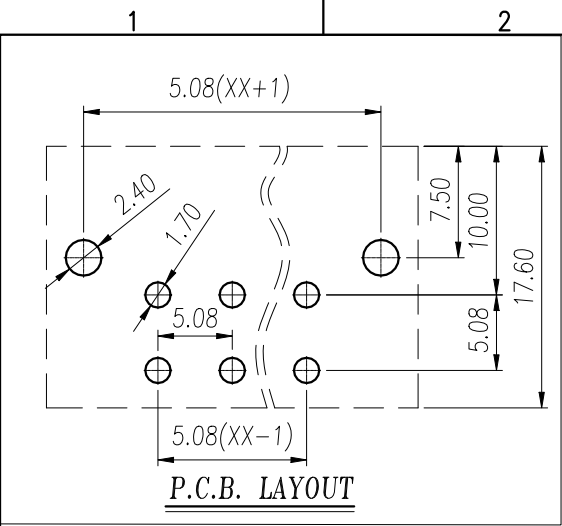


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

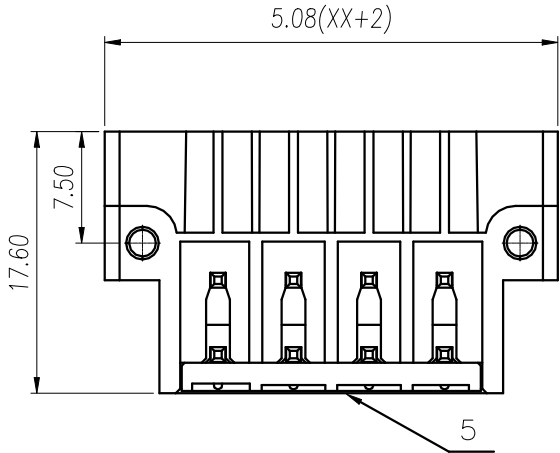

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

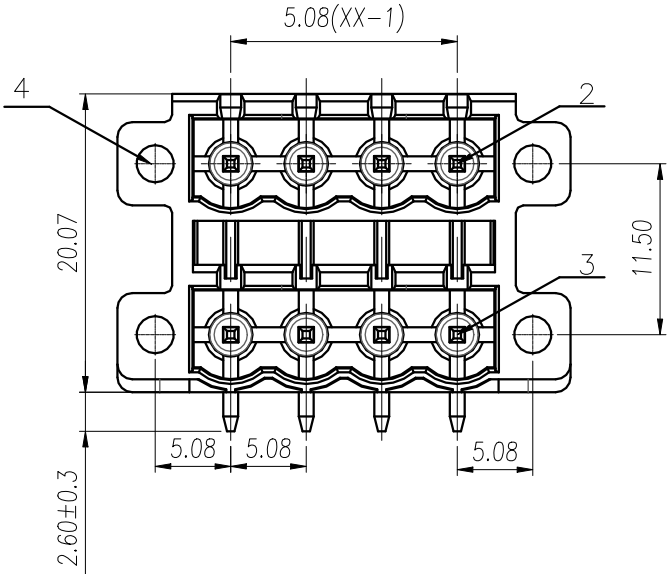

5				6						
REVISION RECORD										
REV.		ESCRIPTION			ECN No.		APPROVED	DATE		
V0		新发行					WangP		24.05.31	
		UL/CUL 技术参数								
		UL/CUL Technical Data								
		等 级		Use Group		B	C	D		
		额定电压		Rated Voltage		[V]	300	-	300	
		额定电流		Rated Current		[A]	15	-	10	
		接线范围		Wire Range		-				
		单/多芯线		Solid/Stranded						[AWG]
		耐电压		Withstanding Voltage		1600V/1Min				
		IEC 技术参数			IEC61984					
		IEC Technical Data								
		过电压类别		Overvoltage Category		III	III	II		
		污染等级		Contamination Class		3	2	2		
		额定电压		Rated Voltage		[V]	250	320	400	
		额定电流		Rated Current		[A]	12	12	12	
		额定冲击电压		Impulse withstand voltage		[KV]	4.0	4.0	4.0	
		导线截面积		Conductor cross section		-				
		硬质/柔性导线		Solid/ flexible						[mm²]
		一般参数			Other Data					
		间距		Pitch /极数		Poles	[mm] / [P]	5.08 / 2*02~2*24		
		工作温度		Operating temperature		[°C]	-40~130			
焊接方法		Soldering method		Reflow Soldering						
符合RoHS环保要求										