

1

2

3




4

5

6

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.27

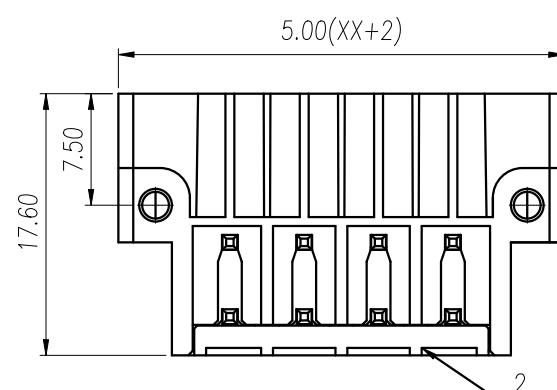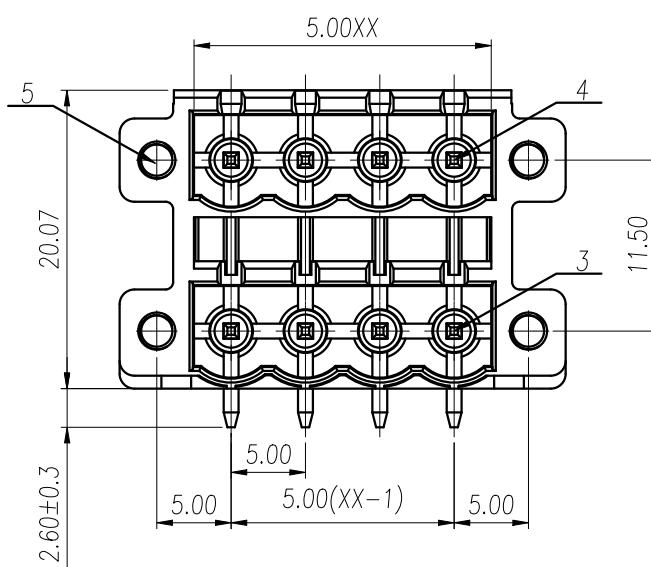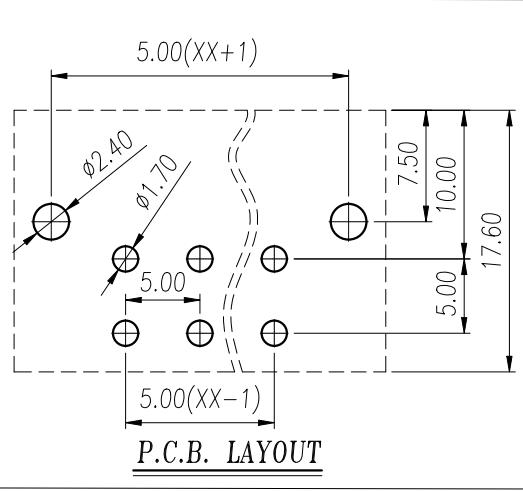

General Tolerances										—			□ ⊥		
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	over 10	over 100	over 100	to	to	to	to	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60					

UL/CUL 技术参数 UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数 IEC Technical Data

IEC61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/ flexible [mm ²]			

一般参数 Other Data

间距 Pitch / 极数 Poles [mm] / [P]	5.0 / 2*02~2*24
工作温度 Operating temperature [°C]	-40~130
焊接方式 Soldering method	Reflow Soldering

符合RoHS环保要求

5	NUT	Copper Alloy	M2.5
4	Pin 2	Copper Alloy	Sn Plated
3	Pin 1	Copper Alloy	Sn Plated
2	Cover	LCP	UL94V-0
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YuCZ	DATE	23.11.27	UNITS	mm	THIRD ANGLE PROJECTION	◎ ⊥
CHK.	YangHJ	DATE	23.11.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.27	SCALE	2:1	DRAWING TYPE: SP-03	REV V0


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD
WJ2EDGRHBM-THR-5.0-2*XXP-1Y-00A

1

2

3

4

5

FOR-0371 Rev.1.0