




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

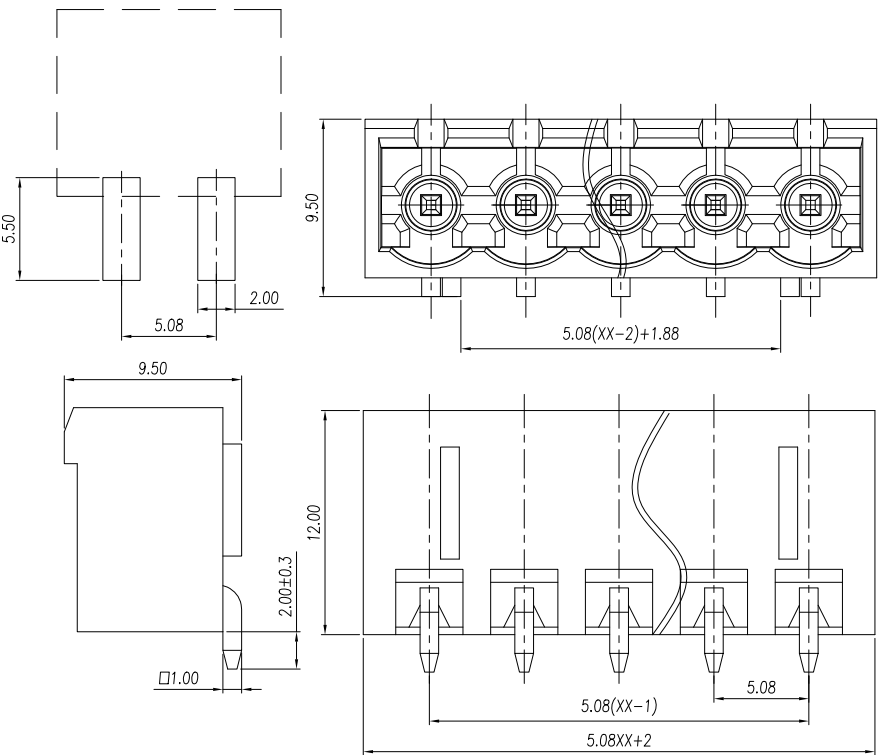

UL/CUL 技术参数					
UL/CUL Technical Data					
等 级		Use Group	B	C	D
额定电压		Rated Voltage [V]	300	-	300
额定电流		Rated Current [A]	15	-	10
接线范围		Wire Range	/		
单/多芯线		Solid/Stranded [AWG]			
耐电压		Withstanding Voltage	1600V/1Min		
IEC 技术参数					
IEC Technical Data					
过电压类别		Overvoltage Category	III	III	II
污染等级		Contamination Class	3	2	2
额定电压		Rated Voltage [V]	250	320	400
额定电流		Rated Current [A]	12	12	12
额定冲击电压		Impulse withstand voltage [KV]	4	4	4
导线截面积					
硬质/柔性导线		Solid/ flexible [mm²]	/		
材 料		Material			
绝缘材料		Insulation Material	LCP		
阻燃等级		Imflammability	UL94V-0		
导体材料		Contact Material	铜合金 Copper alloy		
导体表面镀层		Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data					
间距 Pitch / 极数 Poles		[mm] / [P]	5.08 /02P		
剥线长度		Stripping Length [mm]	/		
螺丝 Screw/ 扭矩 Torque(Max)		[N.m]	/		
工作温度		Operating temperature [°C]	-40~130		
引脚尺寸		Pin Dimensions [mm]	1.0*1.0		
PCB板孔径		PCB Hole Diameter [mm]	/		

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGRS-SMD-5.08-XXP-1Y-00A	