
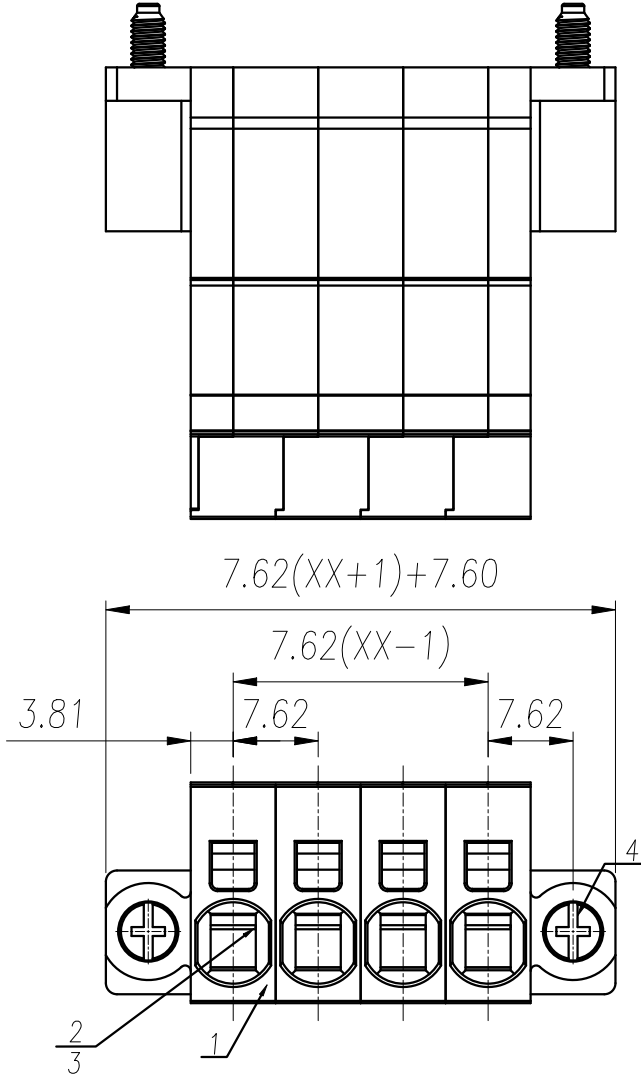


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除事先给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。 本公司保留对涉及发明、实用新型和小发明专利的所有权利。

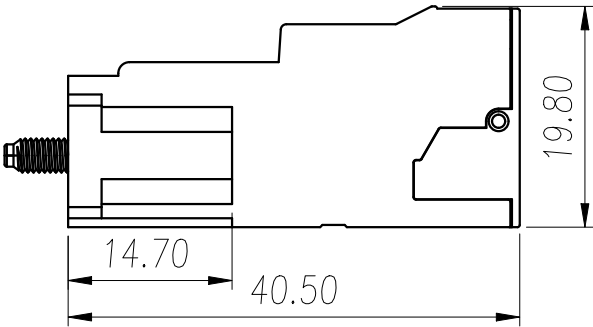

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

4	Screw	Steel	M3/Zn Plated
3	Spring	Stainless steel	
2	Clamp	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YaoFei	DATE	26.01.15	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	26.01.15	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	JASON	DATE	26.01.15	SCALE	2:1	DRAWING TYPE: SP-03	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ3EDGKVRM-7.62-XXP-1Y-00A	
WANJIE						REV	V0

REVISION RECORD							
REV.	ESCRPTION		ECN No.	APPROVED	DATE		
V0	新发行			YaoFei	26.01.15		
UL/CUL 技术 参数 UL/CUL Technical Data			UL1059				
			等 级	Use Group	B	C	D
额定电压			Rated Voltage	[V]	600	600	-
额定电流			Rated Current	[A]	35	35	-
接线范围			Wire Range	24-8			
单/多芯线			Solid/Stranded				[AWG]
耐电压			Withstanding Voltage	2200V/1Min			
IEC 技术参数 IEC Technical Data			IEC61984				
			过电压类别	Overvoltage Category	III	III	II
污染等级			Contamination Class	3	2	2	
额定电压			Rated Voltage	[V]	1000	1000	1000
额定电流			Rated Current	[A]	41	41	41
额定冲击电压			Impulse withstand voltage	[KV]	8.0	8.0	6.0
导线截面积			Conductor cross section	0.2-6.0			
硬质/柔性导线			Solid/ flexible				[mm²]
一般参数			Other Data				
间距			Pitch /极数	Poles	[mm] / [P]	7.62 / 02~12	
剥线长度			Stripping Length	[mm]	14~15		
工作温度			Operating temperature	[°C]	-40~105		
符合RoHS环保要求							