
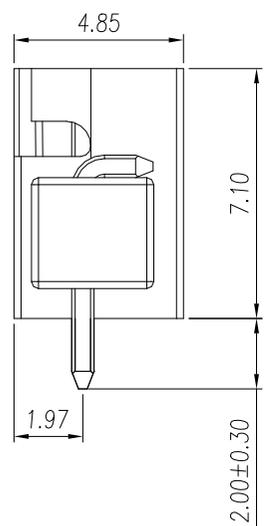
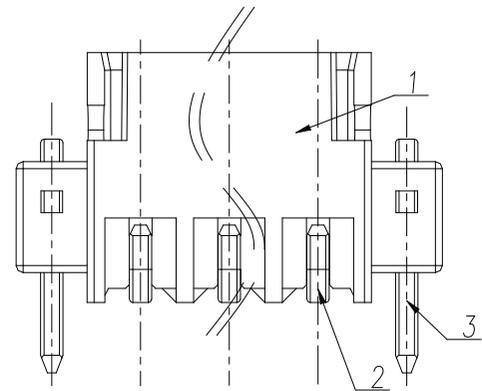
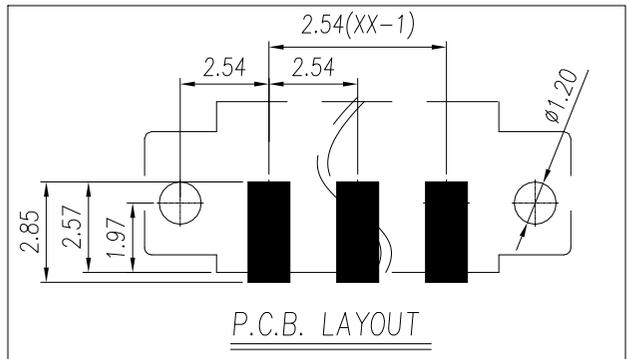


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经声明授权, 否则禁止按址、复制、利用、交还本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及及发明、实用新型和外观设计的所有权利。

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	24.08.15

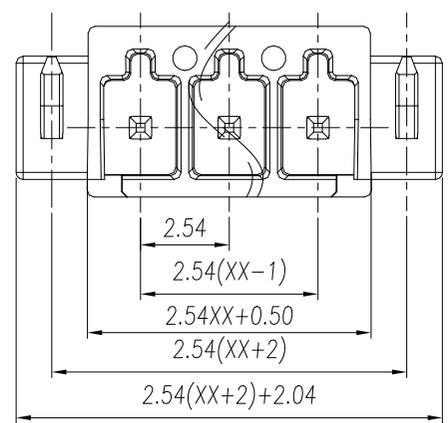

UL/CUL 技术参数		UL1059		
UL/CUL	Technical Data	B	C	D
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	/	/
额定电流	Rated Current [A]	6	/	/
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1300V/1Min		

IEC 技术参数		IEC 61984		
IEC	Technical Data	III	III	II
过电压类别	Overtoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	32	160	160
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	/		
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]			

一般参数		Other Data		
间距	Pitch / 极数 Poles [mm] / [P]	2.54 / 02~24		
工作温度	Operating temperature [°C]	-40~130		
焊接方式	Soldering method	Reflow Soldering		

符合RoHS环保要求			
ITEM	NAME OF PART	MATERIAL	NOTES
3	Pin 2	Copper Alloy	Sn Plated
2	Pin	Copper Alloy	Sn Plated
1	Housing	HIGH-TEMPERATURE PLASTICS	UL94V-0

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES.	YuCZ	DATE	24.08.15	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	24.08.15	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	24.08.15	SCALE	4:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15VDSM-THR-2.54-XXP-1Y-00A	