
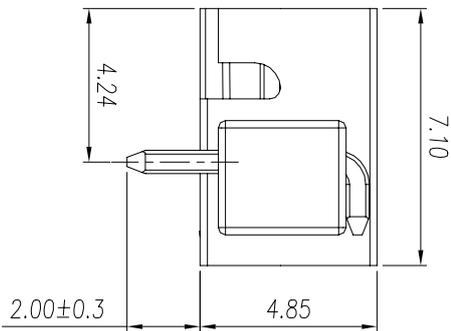
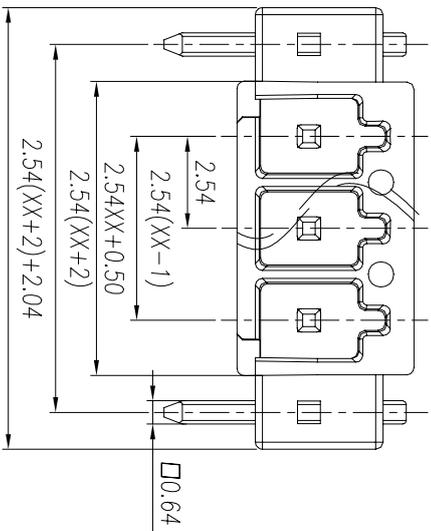
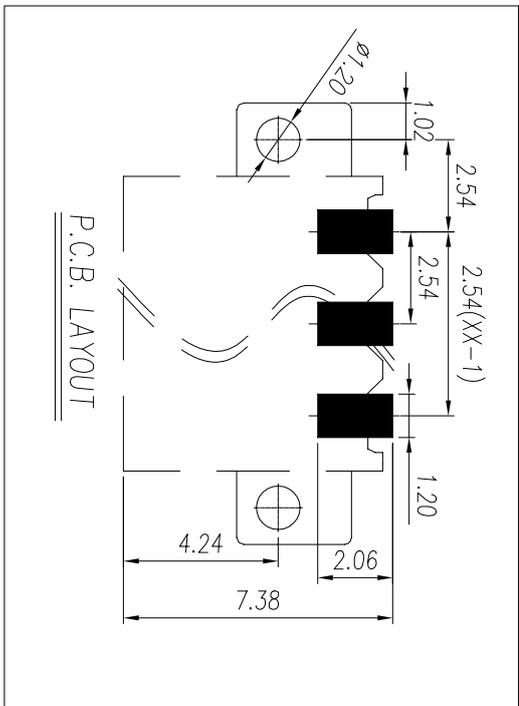


| REVISION RECORD |             |         |               |
|-----------------|-------------|---------|---------------|
| REV.            | DESCRIPTION | EQN.No. | APPROVED DATE |
| V0              | 新发行         |         | 24.08.15      |

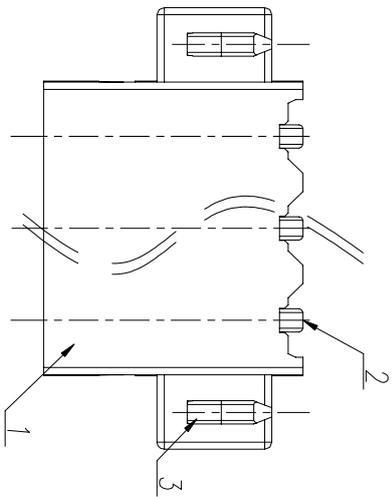

| General Tolerances |       |       |       |       |       |       |      |      |      |      |      |
|--------------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|
| variable range     | to    | over  | over  | over  | over  | over  | over | over | over | over | over |
| 6                  | to    | 6     | 10    | 30    | 60    | 100   | 160  | to   | 10   | 10   | 100  |
| ±0.20              | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |      |      |

| UL/CUL 技术参数 |                      | UL 1059    |   |   |   |
|-------------|----------------------|------------|---|---|---|
| 等级          | Use Group            | B          | C | D |   |
| 额定电压        | Rated Voltage        | 150        | / | / | / |
| 额定电流        | Rated Current        | 6          | / | / | / |
| 接线范围        | Wire Range           | /          |   |   |   |
| 单/多芯线       | Solid/Stranded       | /          |   |   |   |
| 耐电压         | Withstanding Voltage | 1300V/1Min |   |   |   |

| IEC 技术参数 |                           | IEC 61984 |     |     |  |
|----------|---------------------------|-----------|-----|-----|--|
| 过电压类别    | Overvoltage Category      | III       | III | II  |  |
| 污染等级     | Contamination Class       | 3         | 2   | 2   |  |
| 额定电压     | Rated Voltage             | 150       | 160 | 160 |  |
| 额定电流     | Rated Current             | 6         | 6   | 6   |  |
| 额定冲击电压   | Impulse withstand voltage | 2.5       | 2.5 | 2.5 |  |
| 导线截面积    | Conductor cross section   | /         |     |     |  |
| 硬质/柔性导线  | Solid/flexible            | /         |     |     |  |

| 一般参数       |                       | Other Data |                  |
|------------|-----------------------|------------|------------------|
| 间距         | Pitch / 极数            | Poles      | [mm]/[P]         |
|            |                       |            | 2.54/102-24      |
| 工作温度       | Operating temperature | [°C]       | -40~130          |
| 焊接方式       | Soldering method      |            | Reflow Soldering |
| 符合RoHS环保要求 |                       |            |                  |

| DES.                | YUCZ   | DATE     | UNITS | THIRD ANGLE PROJECTION | NOTES        |
|---------------------|--------|----------|-------|------------------------|--------------|
| CHK.                | YangHJ | 24.08.15 | mm    |                        |              |
| APP.                | JASON  | 24.08.15 | A4    | TYPE: CUSTOMER DRAWING | SHEET 1 of 1 |
| DRAWING TYPE: SP-03 |        |          |       | REV                    | V0           |

慈溪市万捷电子有限公司  
 CIXI WANJIE ELECTRONIC CO., LTD  
 PART NO.: WJ15PDSM-THR-2.54-XXP-1Y-00A