
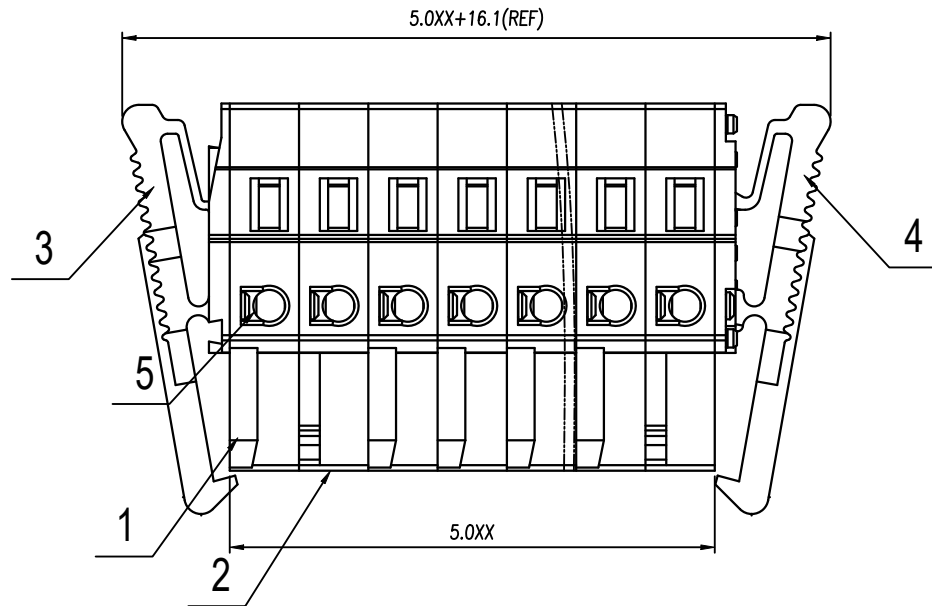
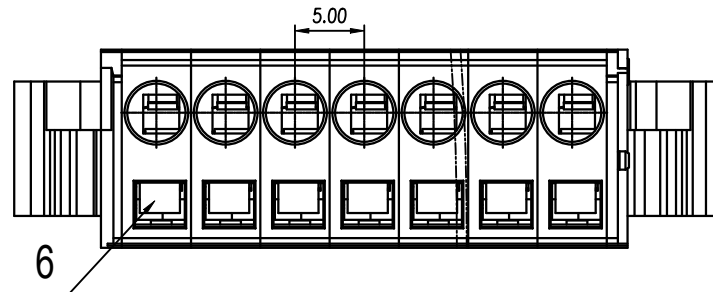


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除本文件内容外, 其他任何内容, 复制或, 利用, 或在本文件内容, 均须事先获得授权。 未经授权擅自复制或传播, 本公司保留追究法律责任。 侵权者将承担相关法律责任。

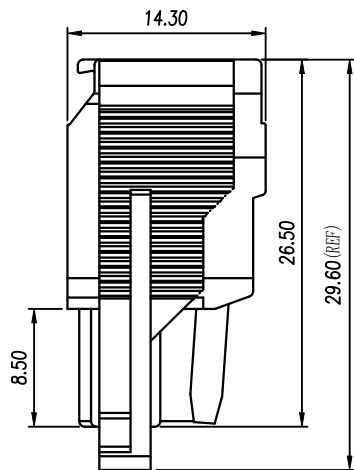

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Spring	Stainless steel	-
5	Clamp	Copper Alloy	Sn Plated
4	Cover2	PA66	UL94V-0
3	Cover1	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.03.15	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.03.15	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.03.15	SCALE	2:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ0401-06XX-1Y-00N	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.03.15

UL/CUL 技术参数						
UL/CUL Technical Data						
等级	Use Group	B	C	D		
额定电压	Rated Voltage	[V]	300	-		300
额定电流	Rated Current	[A]	15	-		10
接线范围	Wire Range	28-12				
单/多芯线	Solid/Stranded					[AWG]
耐电压	Withstanding Voltage	1600V/1Min				
IEC 技术参数					IEC61984	
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	3	2	2		
额定电压	Rated Voltage	[V]	320	320	630	
额定电流	Rated Current	[A]	16	16	16	
额定冲击电压	Impulse withstand voltagea	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section	0.25-2.5				
硬质/柔性导线	Solid/flexible					[mm ²]
材 料 Material						
绝缘材料	Insulation Material	PA66				
阻燃等级	Imflammability	UL94V-0				
导体材料	Contact Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀锡 Sn Plated				
一般参数 Other Data						
间距 Pitch /极数 Poles	[mm] / [P]	5.0 / 02~24				
剥线长度	Stripping Length	[mm]	8~9			
工作温度	Operating temperatur	[°C]	-40~105			

FOR-0371 Rev.1.0