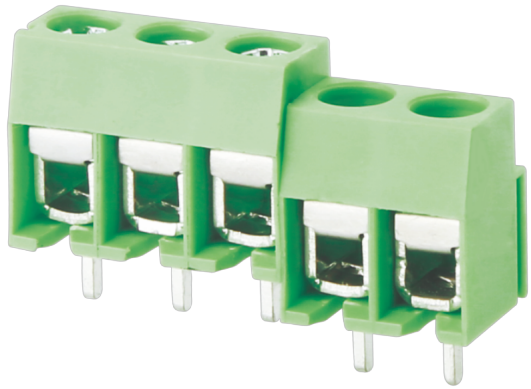


Rated current: 8A

Rated voltage: 300V

Use wire diameter: 26-14AWG

spacing:5.0mm

Install: Wave soldering

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	8	-	8
Wire Range [AWG]	26～14		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	400	630
Rated Current [A]	18	18	18

Impulse withstand voltage [KV]	4	4	4
Conductor cross section [mm²]	0.5~2.5		

Material

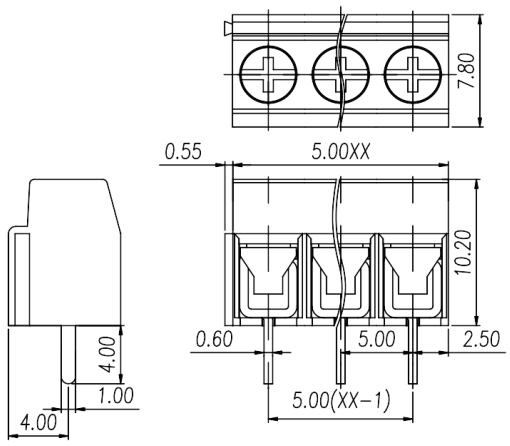
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Date

Pitch/Poles [mm]/[P]	5.0/2～24
Stripping Length [mm]	6-7
Screw/Torque(Max)[N.m]	M2.5/0.25
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	0.6*1.0
PCB Hole Diameter [mm]	Ø1.4

Dimensions

PCB hole diagram


7.80
0.55
5.00XX
10.20
4.00
1.00
4.00
0.60
5.00
2.50
5.00(XX−1)


5.00(XX−1)
φ1.40
5.00
2.50
4.00
7.80
P.C.B. LAYOUT