

Rated current: 41A

Rated voltage: 600V

Use wire diameter: 24-8AWG

spacing:7.62mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	600	-	600
Rated Current [A]	41	-	10
Wire Range [AWG]	24-8		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	1000	1000	1000
Rated Current [A]	41	41	41

Impulse withstand voltage [KV]	8	8	6
Conductor cross section [mm ²]	0.2-6.0		


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Pitch/Poles [mm]/[P]	7.62/2-12
Stripping Length [mm]	10
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [°C]	-40 ~ +105

Dimensions

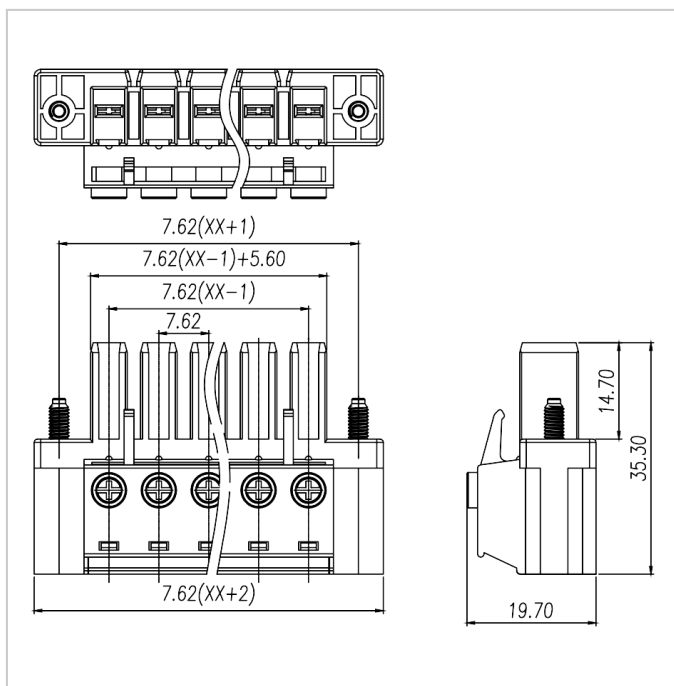

Accessories



WJ3EDGKRN-7.62



WJ3EDGKRP-7.62



WJ3EDGVM-7.62



WJ3EDGVZM-7.62



WJ3EDGRM-7.62



WJ3EDGRZM-7.62



WJ3EDGVHM-7.62



WJ3EDGRHM-7.62



WJ3EDGRRHM-7.62