





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

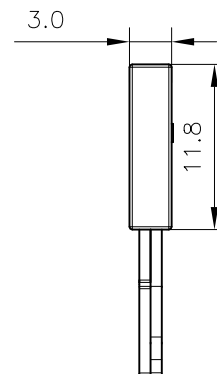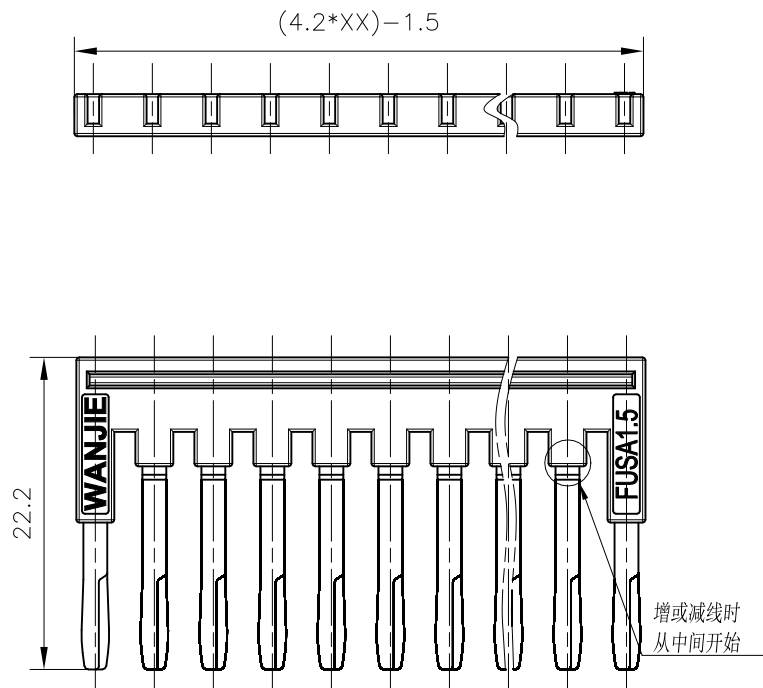

UL/CUL 技术 参数 (UL1059)			
UL/CUL Technical Data			
等 级	Use Group	B	C
额定电压	Rated Voltage	[V]	-
额定电流	Rated Current	[A]	-
IEC 技术参数 (IEC60947-7-1)			
IEC Technical Data			
过电压类别	Overvoltage Category	III	
污染等级	Contamination Class	3	
额定电压	Rated Voltage	[V]	-
额定电流	Rated Current	[A]	17.5
材 料 Material			
绝缘材料	Insulation Material	PA66	
导体材料	Contact Material	铜合金 Copper alloy	
导体表面镀层	Contactive Coating	镀锡 Sn Plated	
一般参数 Other Data			
工作温度	Operating temperatur	[°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

FUSA1.5-10-插拔式桥接件	FUSA1.5-10-RD-00A	镀雾锡	10	40.5
FUSA1.5-09-插拔式桥接件	FUSA1.5-09-RD-00A	镀雾锡	9	36.3
FUSA1.5-08-插拔式桥接件	FUSA1.5-08-RD-00A	镀雾锡	8	32.1
FUSA1.5-07-插拔式桥接件	FUSA1.5-07-RD-00A	镀雾锡	7	27.9
FUSA1.5-06-插拔式桥接件	FUSA1.5-06-RD-00A	镀雾锡	6	23.7
FUSA1.5-05-插拔式桥接件	FUSA1.5-05-RD-00A	镀雾锡	5	19.5
FUSA1.5-04-插拔式桥接件	FUSA1.5-04-RD-00A	镀雾锡	4	15.3
FUSA1.5-03-插拔式桥接件	FUSA1.5-03-RD-00A	镀雾锡	3	11.1
FUSA1.5-02-插拔式桥接件	FUSA1.5-02-RD-00A	镀雾锡	2	6.9
NAME OF PART	NO. OF PART	NOTES	QTY(XX)	LENGTH
单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE
1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0	
名称 / TITLE		FUSA1.5-XX-RD-00A		