

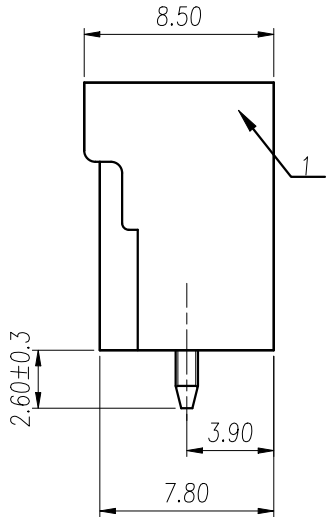


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和小发明专利的所有权利。

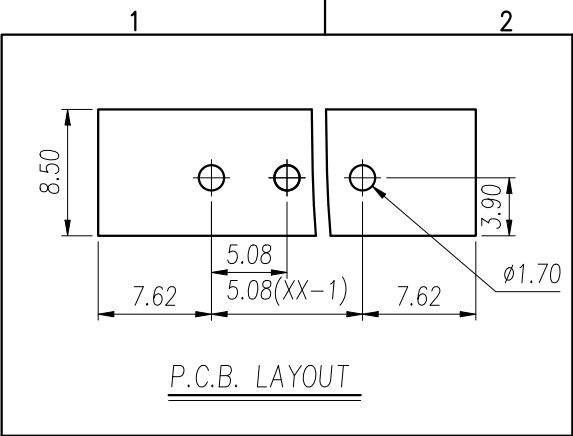



General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

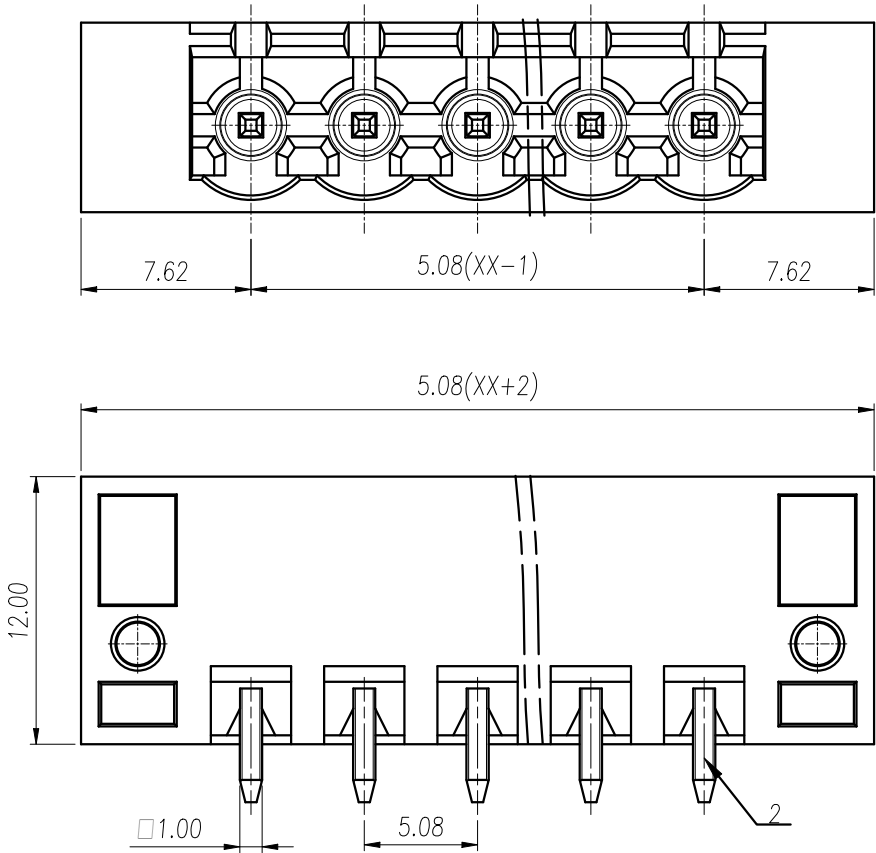

2	Pin	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5				6				
REVISION RECORD								
REV.	ESCRIPTION			ECN No.		APPROVED	DATE	
V0	新发行					ChenK	25.07.18	
<div><div></div><div>62</div><div></div><div></div><div><div></div><div></div><div></div></div></div>				UL/CUL 技术参数		UL1059		
				UL/CUL Technical Data				
				等级	Use Group	B	C	D
				额定电压	Rated Voltage [V]	300	-	300
				额定电流	Rated Current [A]	15	-	10
				接线范围	Wire Range	-		
				单/多芯线	Solid/Stranded [AWG]			
				耐电压	Withstanding Voltage	1600V/1Min		
				IEC 技术参数		IEC61984		
				IEC Technical Data				
				过电压类别	Overvoltage Category	III	III	II
				污染等级	Contamination Class	3	2	2
				额定电压	Rated Voltage [V]	250	320	400
				额定电流	Rated Current [A]	18	18	18
				额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
				导线截面积	Conductor cross section	-		
				硬质/柔性导线	Solid/ flexible [mm²]			
				一般参数 Other Data				
				间距 Pitch / 极数 Poles	[mm] / [P]	5.08 / 02~24		
				工作温度 Operating temperature	[°C]	-40~130		
焊接方式 Soldering method	Reflow Soldering							
符合RoHS环保要求								

DES.	ChenK	DATE	25.07.18	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	25.07.18	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	25.07.18	SCALE	3:1	DRAWING TYPE: SP-03	REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGVMG-THT-5.08-XXP-1Y-00A		